



NOTE:  
IN THE EVENT CONSTRUCTION WORK ON THE ADJACENT  
PROJECT (LAK. 91-2.72) IS CONCURRENT WITH THIS  
PROJECT, ALL WORK BETWEEN STA. 141+18.00 AND  
STA. 145+08.00 SHALL BE NON-PERFORMED.

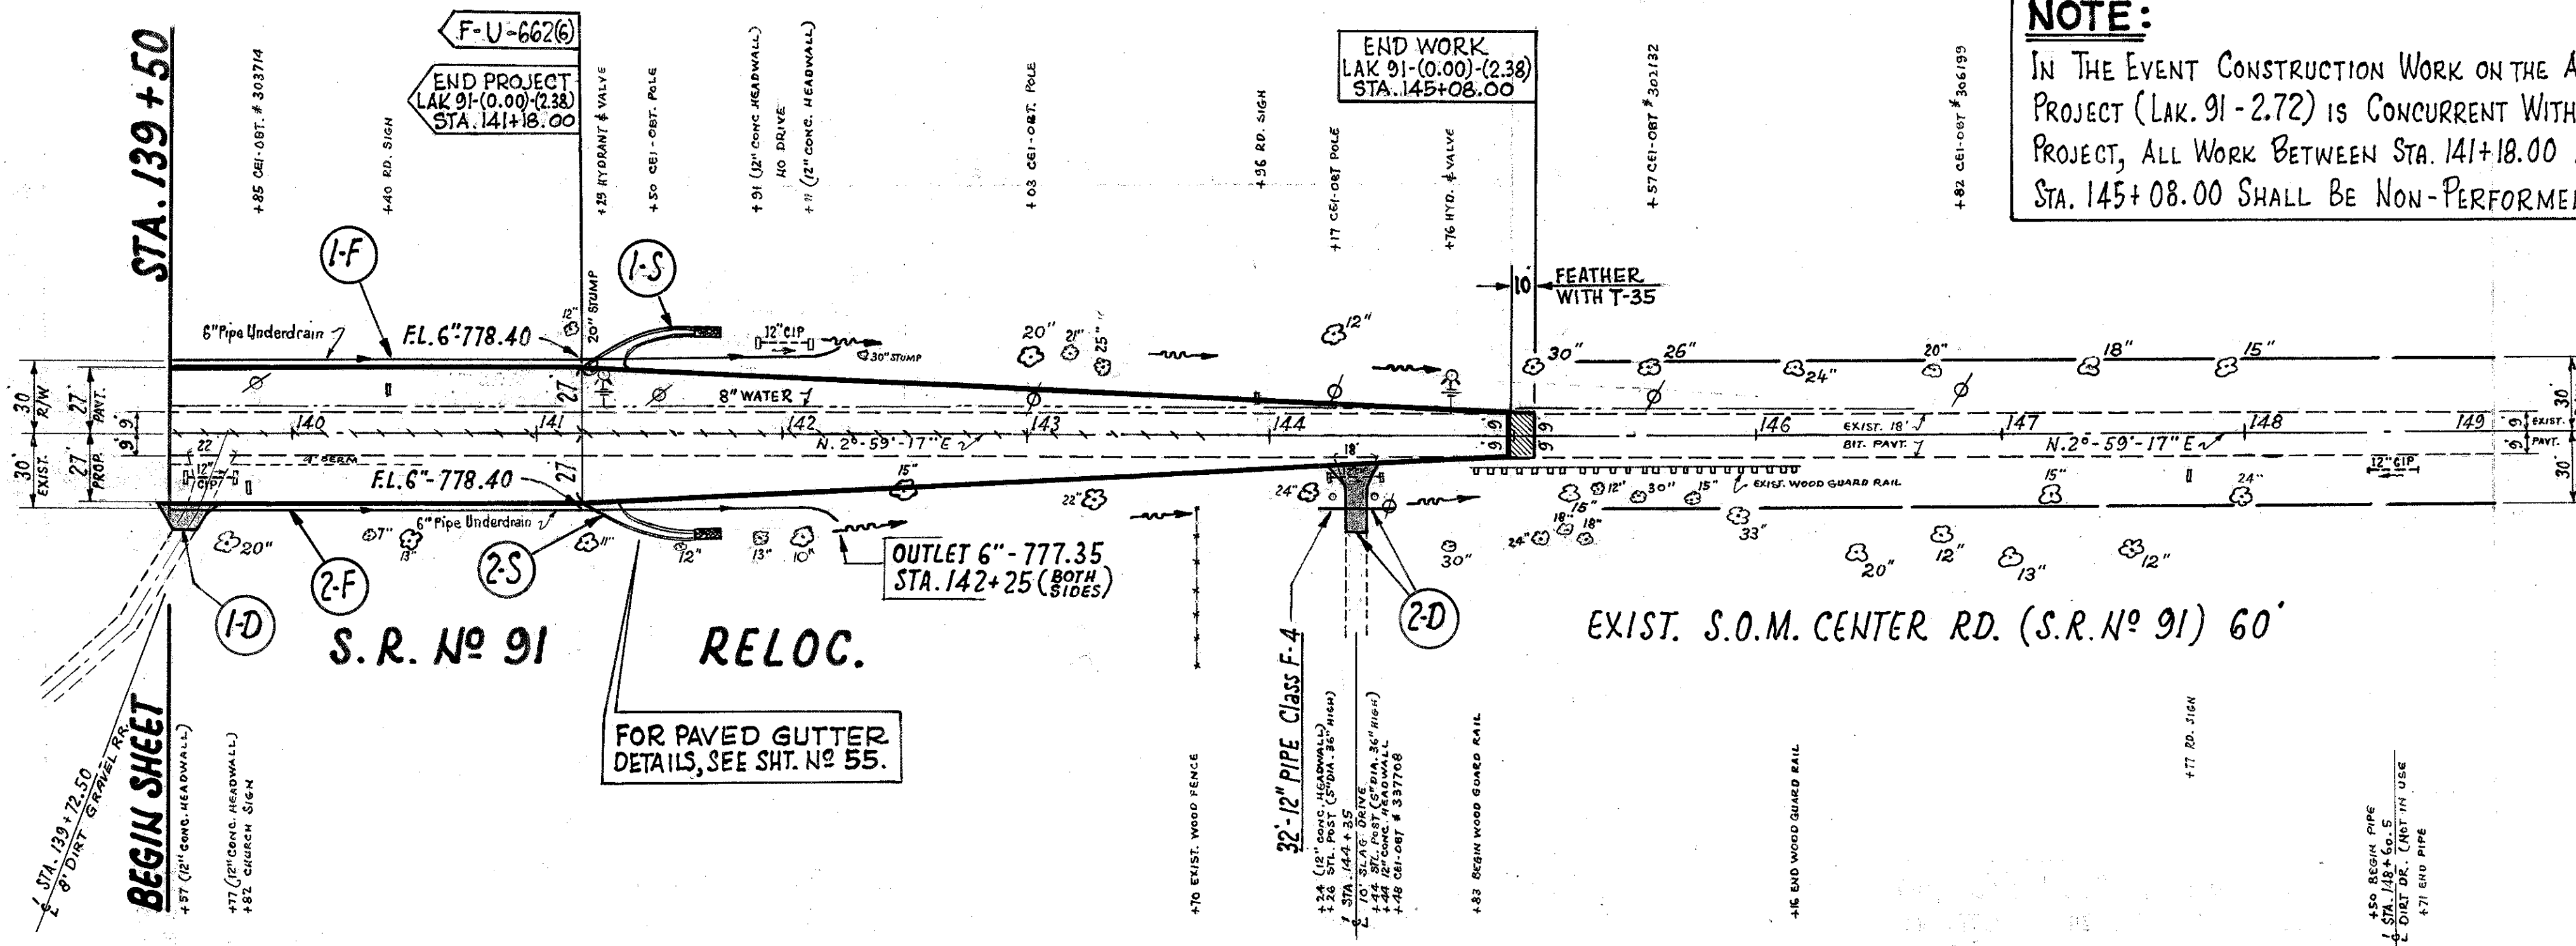

STORM SEWERS				
Ref. No	Station		ITEM I-14	ITEM I-10
	FROM	TO	PAVED GUTTER (TYPE I) LIN. FT.	DUMPED ROCK CHANNEL PROTECTION CU. YDS.
1-S	141+18	141+75	50	2.25
2-S	141+18	141+75	50	2.25
<b>TOTAL</b>			<b>100</b>	<b>4.5</b>

6" UNDERDRAINS				
Ref. No	Station		SIDE R OR L	ITEM I-1
	FROM	TO		6" PIPE Class I-3 (SHALLOW) LIN. FT.
1-F	139+50	142+25	L	276
2-F	139+50	142+25	R	276
<b>TOTAL</b>				<b>552</b>

TRAFFIC DIVIDERS		
Station		ITEM I-23
FROM	TO	PRECAST WHITE PORTLAND CEMENT TRAFFIC DIVIDERS EACH
139+52	143+72	36
<b>TOTAL</b>		<b>36</b>

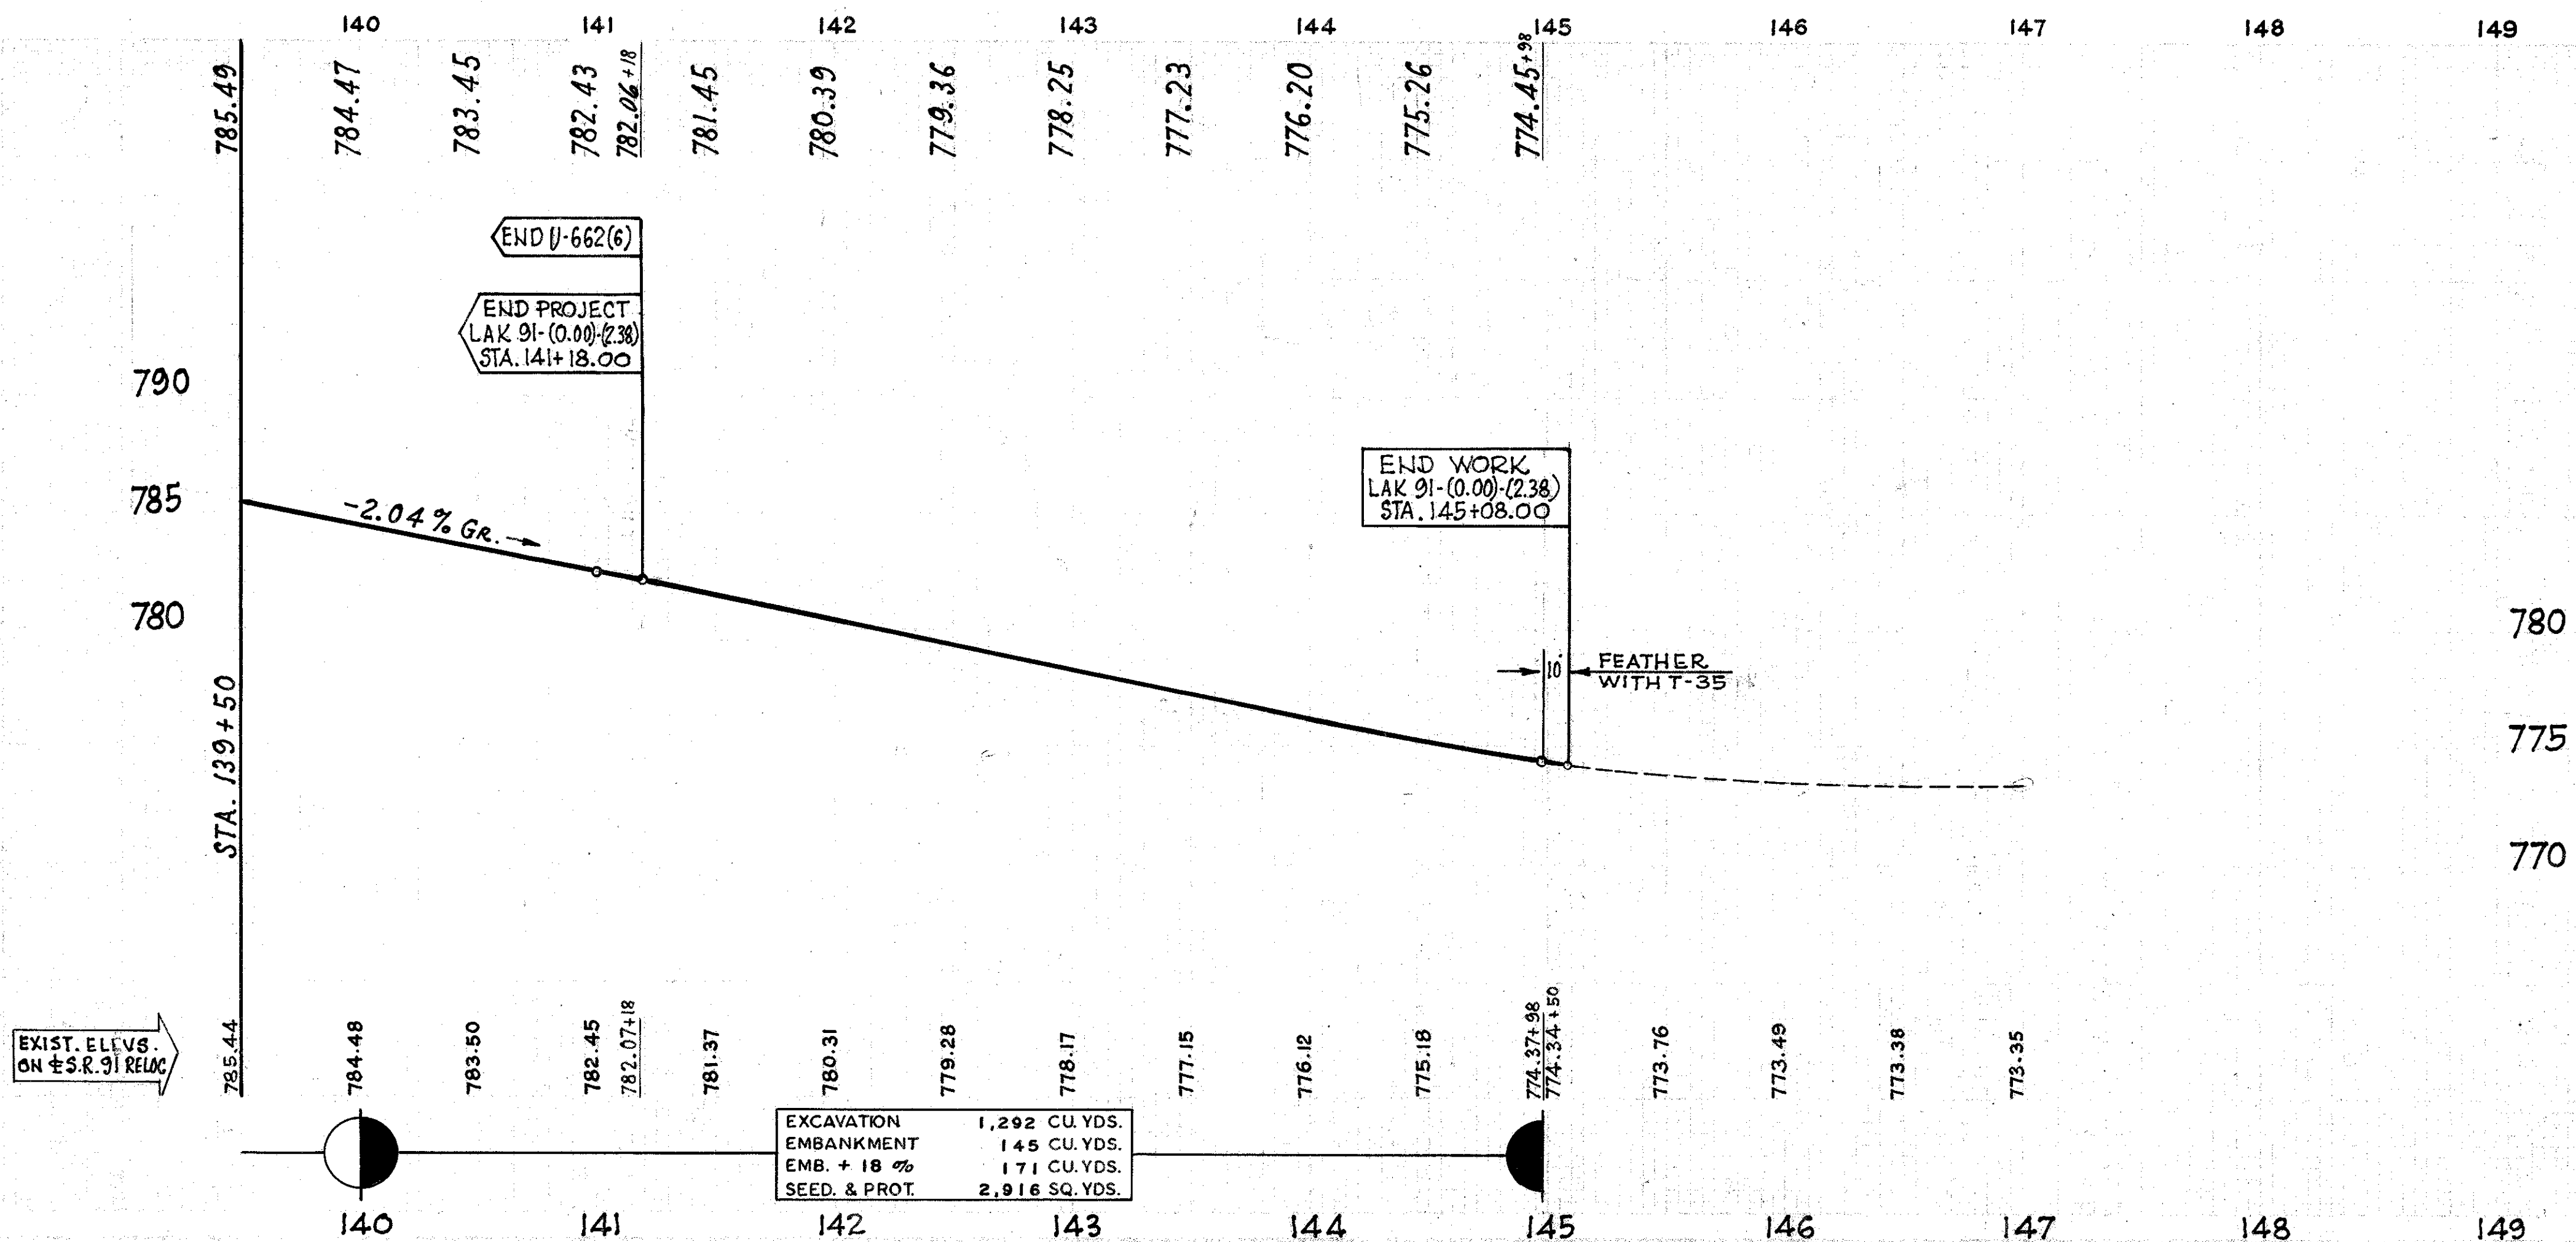

PLAN & PROFILE -- S.R. #91 RELOC. -- STA. 139+50 to STA. 149+00