CC-5 #1

FED. RD. DIVISION	STATE	PROJECT	
2	OHIO	F-U-662 (6)	

130
146

F - 662 (6)
U - 662 (6)

LAKE COUNTY
LAK-91-(0.00)-(2.38)

R/W 1/12

STATE OF OHIO
DEPARTMENT OF HIGHWAYS
LAK. 91-(0.00)(2.38)
LAKE COUNTY
VILLAGE OF WILLOUGHBY HILLS
CITY OF WILLOUGHBY
CUYAHOGA COUNTY
VILLAGE OF MAYFIELD

CONVENTIONAL SIGNS

COUNTY LINE
CORPORATION LINE
CENTER LINE
PROPERTY LINE
RIGHT OF WAY LINE
FENCE LINE
UTILITY POLE LINE
GUARD RAIL EXISTING
GUARD RAIL PROPOSED
RAIL ROAD
TREES
TREES TO BE REMOVED

INDEX OF SHEETS

Title Sheet	1	Waterwork Quantities & Notes	46
Location Plan	2	Not Used	47-48
Typical Sections	3-8	Driveway Quantities	49-51
General Notes	9-10	Culvert Details	52-54
Summary of Quantities	11	Drainage & other Details	55
Calculations	12-14	Cross Section	
General Summary	15, 15 A, 16, 16 A	S.R. 91	56-14
Plan & Profile		Dixon Rd. & Timberline Rd.	115
S.R. 91	17-32	U.S.R. 6	116-122
Martin Rd. Storm Sewer	33	Eddy Rd.	123-125
U.S.R. 6	34-35	Maplegrove Rd.	126-128
Eddy Rd.	36	S.R. 84	129
Maplegrove Rd.	37	Right of Way Plans	130-146
S.R. 84	38		
Intersection Details	39-45		

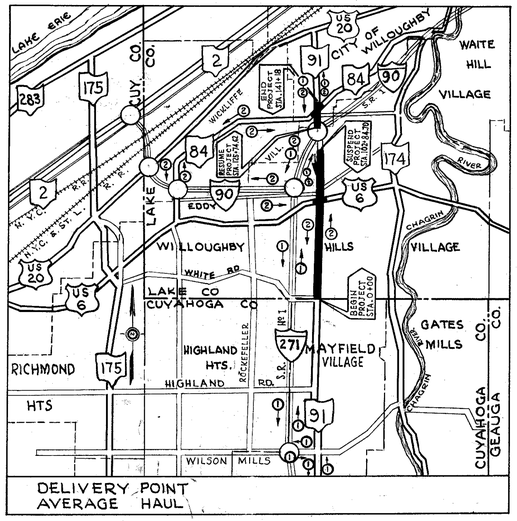

LOCATION MAP

SCALE IN MILES

0 1 2 3 4

PORTION TO BE IMPROVED
STATE HIGHWAYS
OTHER HIGHWAYS
DETOURS

SCALES

PLAN ..... 1" = 50'
PROFILE HOR. ..... 1" = 10'
PROFILE VERT. ..... 1" = 10'

SCALE IN FEET

0 50 100
0 10 20

LINE DATA

Location:		BEGIN STATION	SUSPEND STATION	RESUME STATION	END STATION	LENGTH FT.	LENGTH MILES
F-662 (6)	S.R. 91	0+00	102+84.70	——	——	10,284.70	1.948
U-662 (6)	S.R. 91	——	——	125+74.62	141+18.00	1,543.38	0.292
TOTAL LENGTH OF PROJECT:						11,828.08	2.240
F-662 (6)	S.R. 91	0-398.73	109+67.21	——	——	11,365.94	——
	U.S.R. 6	0-93.00	——	——	12+87.00	1,380.00	——
	EDDY RD.	0-100.00	——	——	9+00.00	1,000.00	——
Net Length of Work:						13,745.94	2.603
U-662 (6)	S.R. 91	——	——	122+89.93	145+08.00	2,218.07	——
	MAPLEGROVE RD.	3+00.00	——	——	13+50.00	1,050.00	——
	S.R. 84	116+66.30	118+76.42	119+00.00	125+05.00	815.12	——
Net Length of Work:						4,083.19	0.773
TOTAL LENGTH OF WORK:						17,829.13	3.376

FILE Nº	LAKE COUNTY LAK-91-(0.00)-(2.38)
_____	DATE OF LETTING _____ 19
	CONTRACT Nº _____

SUPPLEMENTAL PRINTS OF STANDARD CONSTRUCTION DRAWINGS

DR-1	1-3-58	I-8 M.H. Nº1	2-1-63	L-3-A	4-1-50		
G-7.07	6-1-56	I-8 M.H. Nº1-A	2-1-63	R.I.-1	7-15-58		
HW-E	2-1-63	I-8 M.H. Nº2	2-1-63	T-35	1-2-56		
I-1	11-15-60	I-14 G	1-22-52	FAC I-1	3-8-63		
I-8 C.B. 22-A & B	2-1-63	I-15 Nº 1	11-15-60	FAC I-2	3-8-63		
I-8 C.B. 23 & 24	2-1-63	I-15 Nº 2-A	8-17-60				
I-8 C.B. Nº 3	2-1-63	I-15 Nº 4	12-1-54				
I-8 C.B. Nº 3-A	2-1-63	I-21-23	8-1-56				
I-8 C.B. Nº 6	2-1-63	L-1	4-1-50				
I-8 I. Nº 2	2-1-63	L-3	4-1-50				

SUPPLEMENTAL SPECIFICATIONS

I-124	Rev. 3-20-61		

1963 Specifications

The Standard Specifications of the State of Ohio Department of Highways including changes and Supplemental Specifications listed in the proposal shall govern this improvement.

The right of way for this improvement will be provided by the State of Ohio.

I hereby approve these plans and declare that the making of this improvement will require the closing to traffic of the highway, except as noted on Sheet Nº 10, and that detours will be provided as indicated on the plans.

Approved _____
Date _____ Division Deputy Director

Approved _____
Date _____ Engineer of Bridges

Approved _____
Date _____ Engineer of Location and Design

Approved _____
Date _____ Deputy Director of Design and Construction

Approved _____
Date _____ Deputy Director of Right of Way

Approved _____
Date _____ Deputy Director of Planning and Programming

Approved _____
Date _____ First Assistant Director

Approved _____
Date _____ Director of Highways

DEPARTMENT OF COMMERCE
BUREAU OF PUBLIC ROADS

APPROVED:

_____ _____
DIVISION ENGINEER DATE

FEB 24 1964

R/W - TITLE SHEET