

Ingress-Egress A stone access drive complete with under lying geo—textile fabric (20 feet wide and 50 feet long) for ingress and egress at the site shall be installed. This drive shall be the only entrance and exit to the site.

All silt fence shall be installed prior to any earthwork activities at the site in the locations shown on the site plan as well as along the front of any lot that slopes towards the street.

Temporary Seeding Disturbed areas of the site that are to remain idle for more than thirty (30) days shall be properly seeded and straw mulched within seven (7) days of completion of initial grading. Temporary seeding and mulching of a thirty (30) foot strip of the entire front of the lot shall be maintained on the site once initial grading is complete.

Stabilization of critical areas within fifty (50) feet of any stream or wetland shall be complete within two (2) days of the disturbance if the site is to remain inactive for longer than fourteen (14) days.

Mulching
Straw—mulch shall be applied at a rate of 1 bale per every ten


- width of thirty (30) feet of the entire length of the lot. Wood chips may also be used but must be spread at a minimum depth of four inches over the thirty—foot width and must be accompanied by a properly installed silt


Maintenance


Erosion and sediment controls shall be inspected every seven (7) days or within 24 hours of a 0.5" or greater rainfall event. Necessary repairs shall be made at this time.

All erosion and sediment control specifications, applications, and timetables are based on the descriptions and standards of The Ohio Department of Natural Resources "Rainwater and Land Development Manual" and can be found in the Lake County Erosion and Sediment Control Rules as adopted December 21,

The specified erosion and sediment control standards are the general guidelines and shall not limit the right of the county to impose, at any time, additional, more stringent requirements. Nor shall the standards limit the right of the county to waive, in writing, individual requirements.

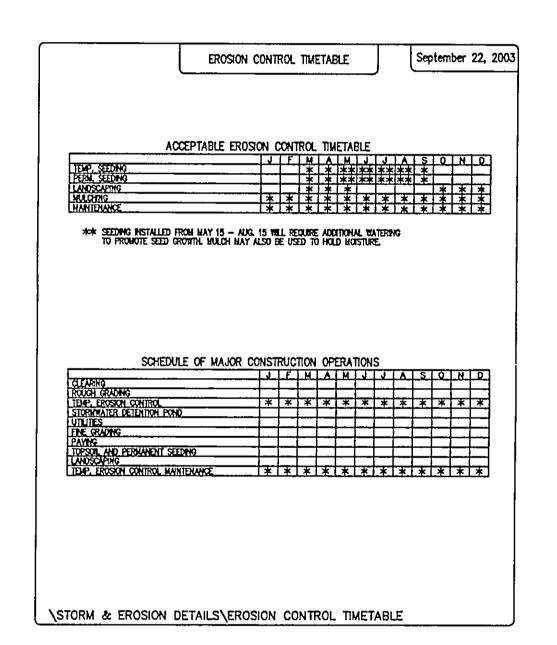

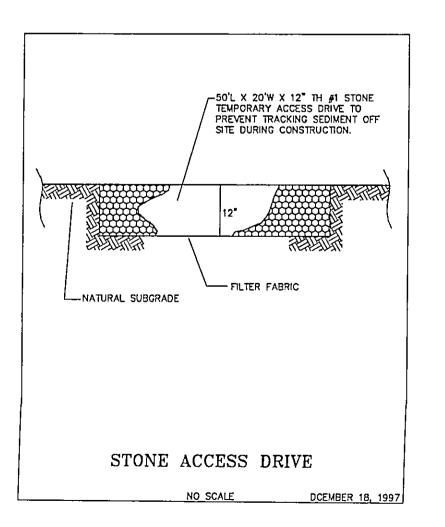

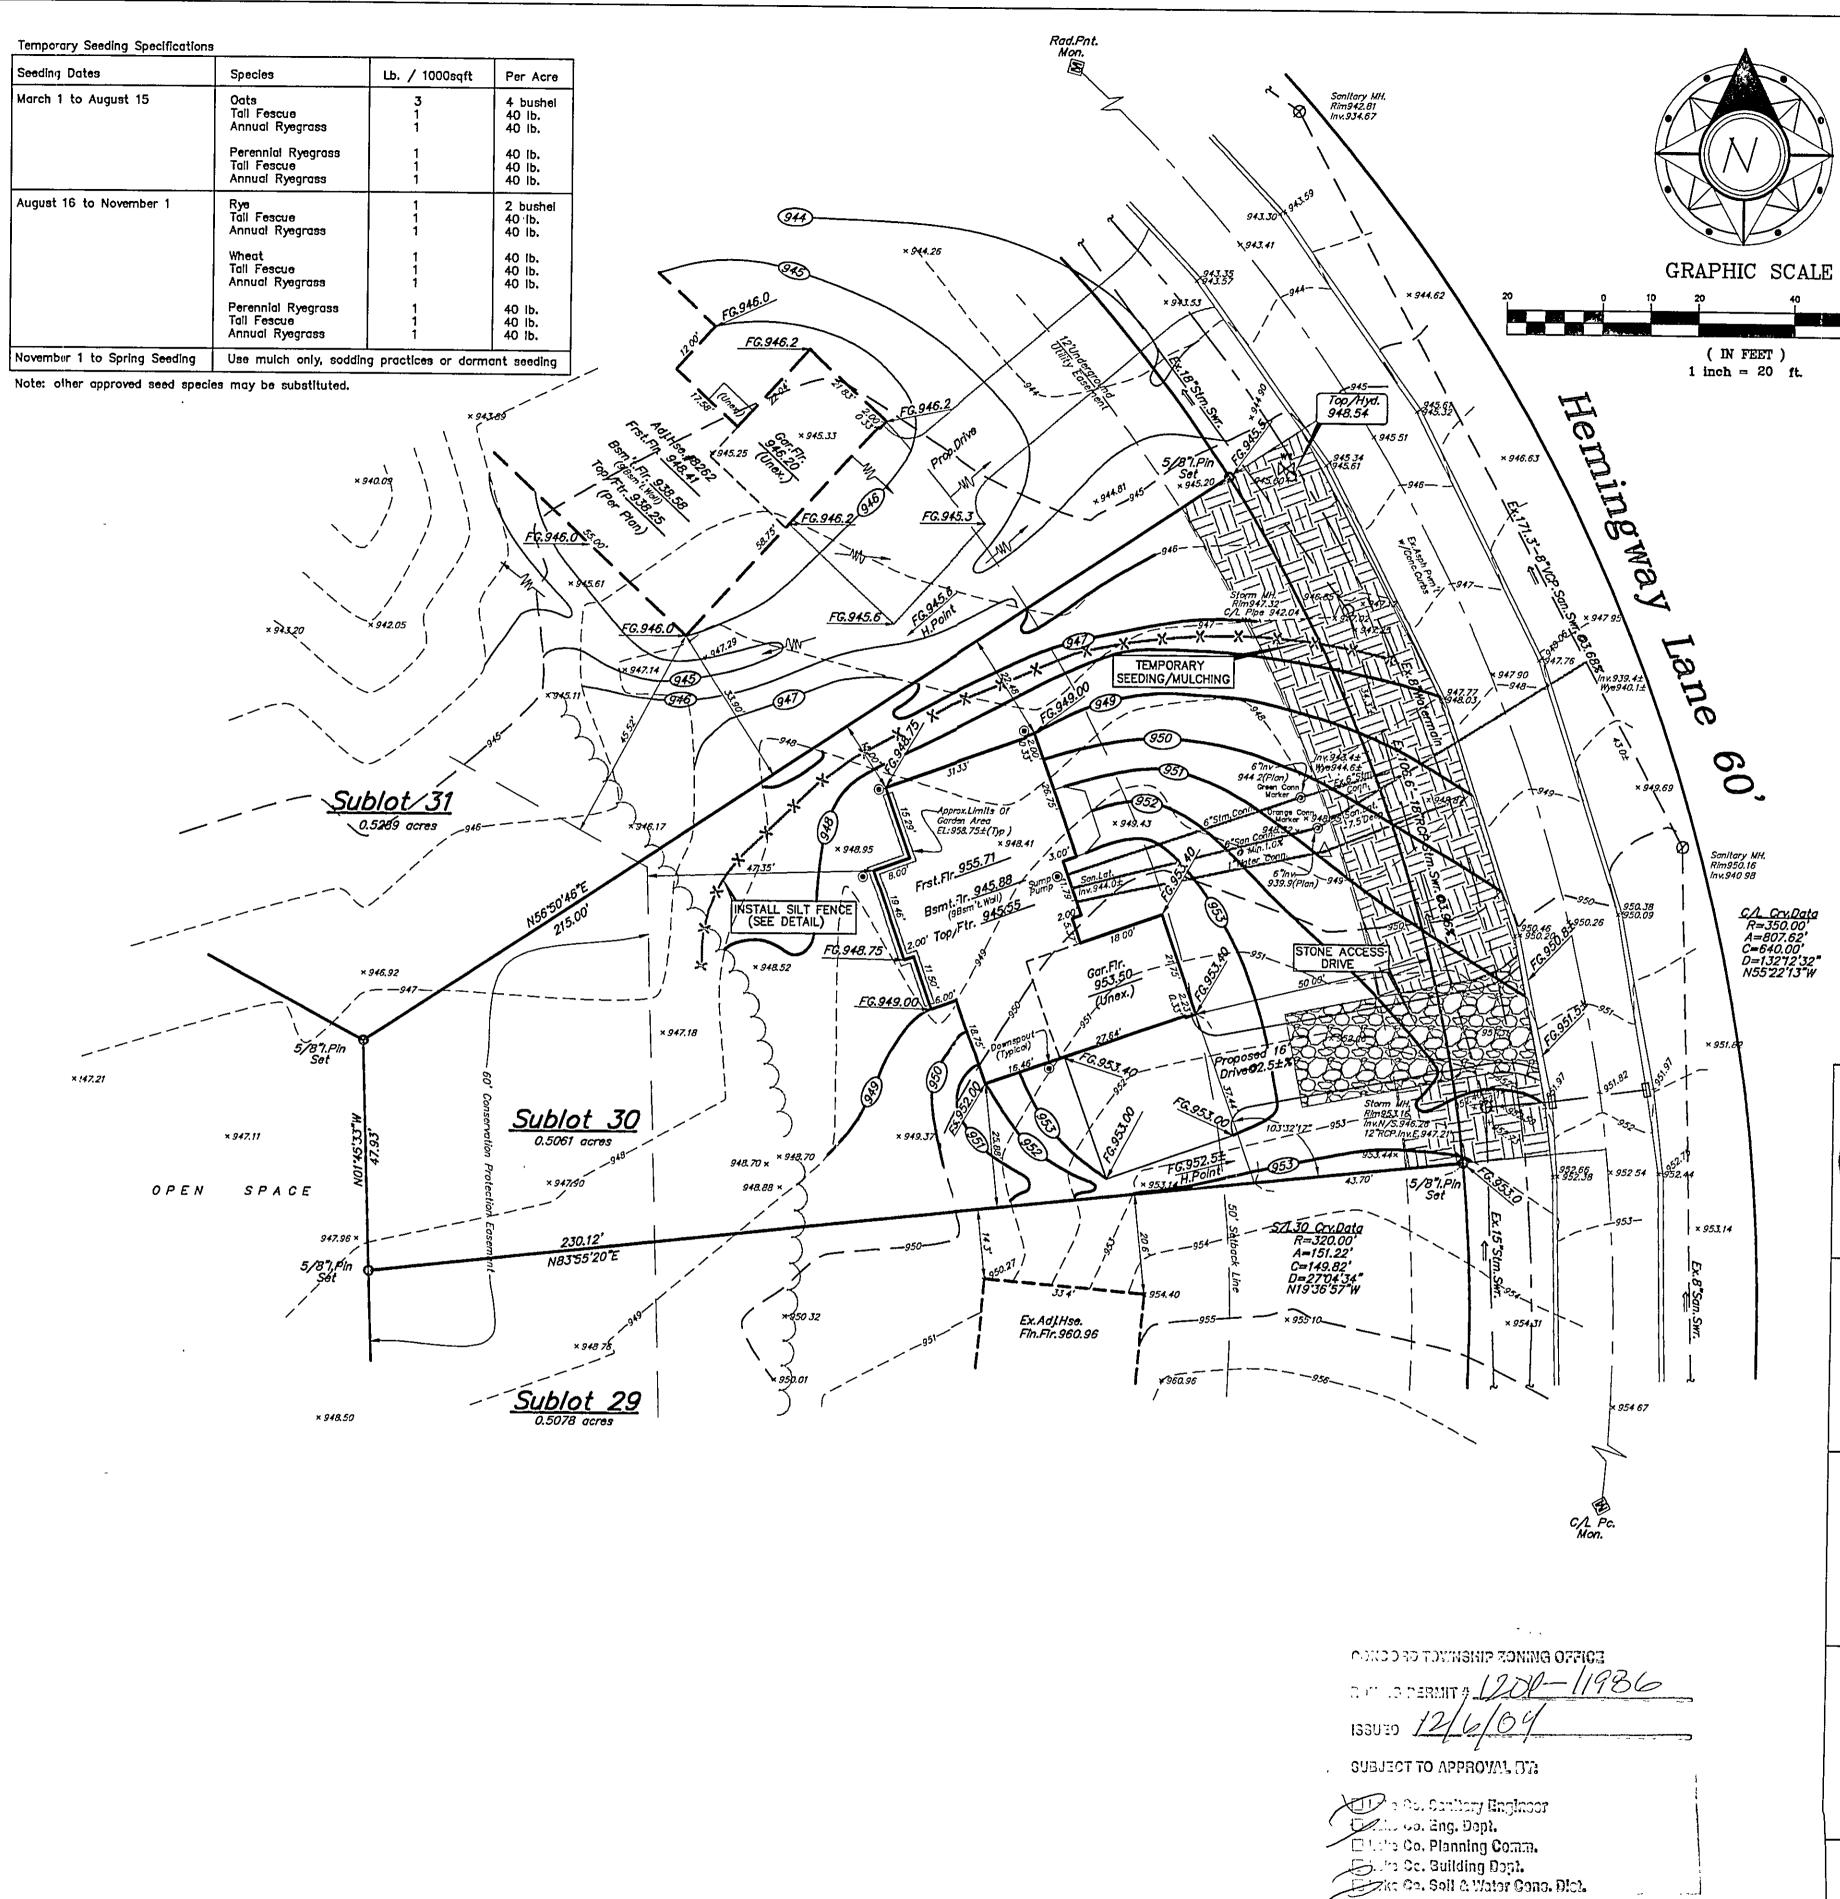

GEOTEXTILE FABRIC (FACING FLOW DIRECTION, WRAPPED AROUND BOTTOM OF TRENCH) 1¼"x 1¼"x 48" HARDWOOD POSTS Φ 6' MAX. C/C. USE EXCAVATED SOIL TO BACKFILL TRENCH GROUND LEVEL-FLOW DIRECTION TYPICAL CROSS SECTION SILT FENCE DETAIL NO SCALE DECEMBER_19, 1997 ESTIMATED IMPERVIOUS AREA House Summary Model#3644, El.#3 HOUSE: 0.06Ac. DRIVE: 0.04Ac. 3-Car Side Entry, Left Hand With Garden Wall Bsm't. TOTAL: 0.10Ac. Str.Add.#8268 Hemingway Lane -See Architect Plans For Complete House Dimensions. -Utility Connections Per Plan; NOTE: HOUSE DOWNSPOUTS TO Contractor To Verify Location BE TIED INTO EXISTING And Depth Of All Laterals. STORM SYSTEM. -FINAL LOCATION OF DOWNSPOUTS TO BE VERIFIED WITH ARCHITECTURAL PLANS. I, THE UNDERSIGNED, HEREBY CERTIFY THAT THIS TOPOGRAPHY, INDICATED BY 6", 1', OR 2' CONTOURS, AND ELEVATIONS SHOWN HEREON, REPRESENT AN ACTUAL FIELD SURVEY MADE BY ME ON THE 30th. DAY OF JULY , 2004, AND THAT THE ELEVATIONS WERE TAKEN AT APPROPRIATE INTERVALS AND THAT AS OF THAT DATE, THEY EXISTED AS INDICATED HEREON. Dustin R. Keeney, P.E.65515/ Site & Grade Hse.,11-16-04 G.S.V. POLARIS ENGINEERING & SURVEYING, INC. 90 ars 34600 CHARDON ROAD - SUITE D WILLOUGHBY HILLS, OHIO 44094 (440) 944-4433 (440) 944-3722 (Fax) www.polaris-es.com DESIGN CERTIFICATION THIS PLAN WAS PREPARED BY ME, AND IS CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF. 11/16/04 DATE BENCHMARK: DUSTIN R. KEENEY E-65515 B.M. = T.B.M Set On Top Of Hydrant Located In Front Of S/L 30 Elevation 948.54 "AS-BUILT" CERTIFICATION I HEREBY CERTIFY THAT THE CIRCLED INFORMATION IS EXISTING AS OBTAINED ON THE SITE _____ AND IS CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF. DATE CONTRACT No. SUBLOT 30 04568

NAME

Holden Ridge Ph.2 WELLESLEY CHASE SUB'D. PHASE Z

Concord Twp., Lake County, Ohio

Stormwater Management Plan Approved as shown and/or notes JAMES R. GILLS, P.E. County Drainage Engineer

L.S. Date 12/8/04

ROOF DRAINS

SHALL DISCHARGE TO SPLASH BLOCKS.

DATE: 11/16/04

SCALE: HOR. 1"=20'

VERT.__

FILENAME: sublot 30.dwg