Erosion and Sediment Control Schedule

Ingress—Egress
A stone access drive complete with under lying geo—textile fabric (20 feet wide and 50 feet long) for ingress and egress at the site shall be installed. This drive shall be the only entrance and exit to the site.

Silt Fence
All silt fence shall be installed prior to any earthwork activities at the site in the locations shown on the site plan as well as along the front of any lot that slopes towards the street.

Temporary Seeding
Disturbed areas of the site that are to remain idle for more than twenty—one(21) days shall be properly seeded and straw mulched within seven (7) days of completion of initial grading.
Temporary seeding and mulching of a thirty (30) foot strip of the entire front of the lot shall be maintained on the site once initial grading is complete.


Stabilization of critical areas within fifty (50) feet of any stream or wetland shall be complete within two (2) days of the disturbance if the site is to remain inactive for longer than fourteen (14) days.


Straw—mulch shall be applied at a rate of 1 bale per every ten (10) feet of curb, at a width of thirty (30) feet of the entire length of the lot. Wood chips may also be used but must be spread at a minimum depth of four inches over the thirty—foot width and must be accompanied by a properly installed slit

Maintenance
Erosion and sediment controls shall be inspected every seven (7)
days or within 24 hours of a 0.5" or greater rainfall event.
Necessary repairs shall be made at this time.

Note:
All erosion and sediment control specifications, applications, and timetables are based on the descriptions and standards of The Ohio Department of Natural Resources "Rainwater and Land Development Manual" and can be found in the Lake County Erosion and Sediment Control Rules as adopted December 21,

The specified erosion and sediment control standards are the general guidelines and shall not limit the right of the county to impose, at any time, additional, more stringent requirements. Nor shall the standards limit the right of the county to waive, in writing, individual requirements.

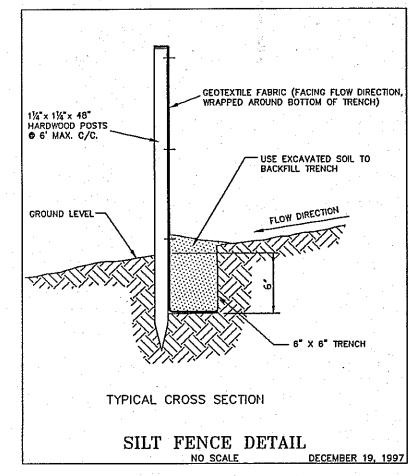

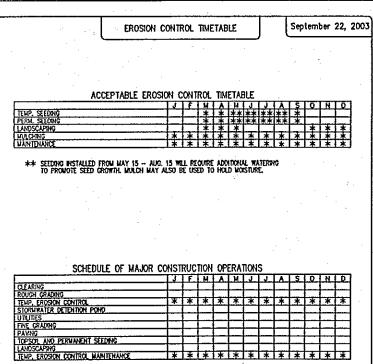


\STORM & EROSION DETAILS\EROSION CONTROL TIMETABLE

Seeding Dates	Species	Lb. / 1000sqft	Per Acre
March 1 to August 15	Oats Tall Fescue Annual Ryegrass	3 1 1	4 bushel 40 lb. 40 lb.
	Perennial Ryegrass Tall Fescue Annual Ryegrass	1 1 1	40 lb. 40 lb. 40 lb.
August 16 to November 1	Rye Tall Fescue Annual Ryegrass	1 1 1	2 bushel 40 lb. 40 lb.
	Wheat Tall Fescue Annual Ryegrass	1 1 1	40 lb. 40 lb. 40 lb.
	Perennial Ryegrass Tall Fescue Annual Ryegrass	1 1	40 lb. 40 lb. 40 lb.

November 1 to Spring Seeding Use mulch only, sodding practices or dormant seeding

Note: other approved seed species may be substituted.

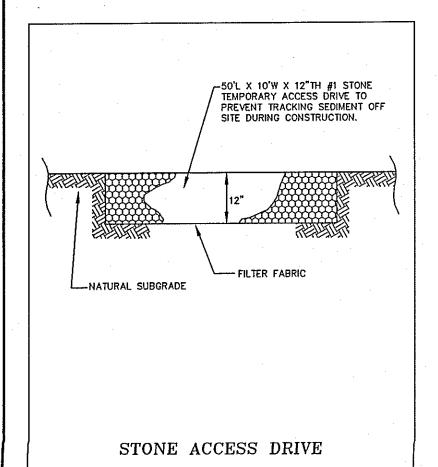


2 WORKING DAYS
BEFORE YOU DIG

CALL TOLL FREE 800-362-2764

OHIO UTILITIES PROTECTION SERVICE
NON-MEMBERS MUST BE CALLED DIRECT

DCEMBER 18, 1997


EXISTING UNDERGROUND UTILITIES NOTE:
THE SIZE AND LOCATION, BOTH HORIZONTAL AND VERTICAL
OF THE UNDERGROUND UTILITIES SHOWN HEREON, HAVE BEEN
OBTAINED BY A SEARCH OF AVAILABLE RECORDS. VERIFICATION
BY FIELD OBSERVATION HAS BEEN CONDUCTED WHERE PRACTICAL
HOWEVER, POLARIS ENGINEERING & SURVEYING, INC. DOES NOT
GUARANTEE THE COMPLETENESS NOR ACCURACY THEREOF.

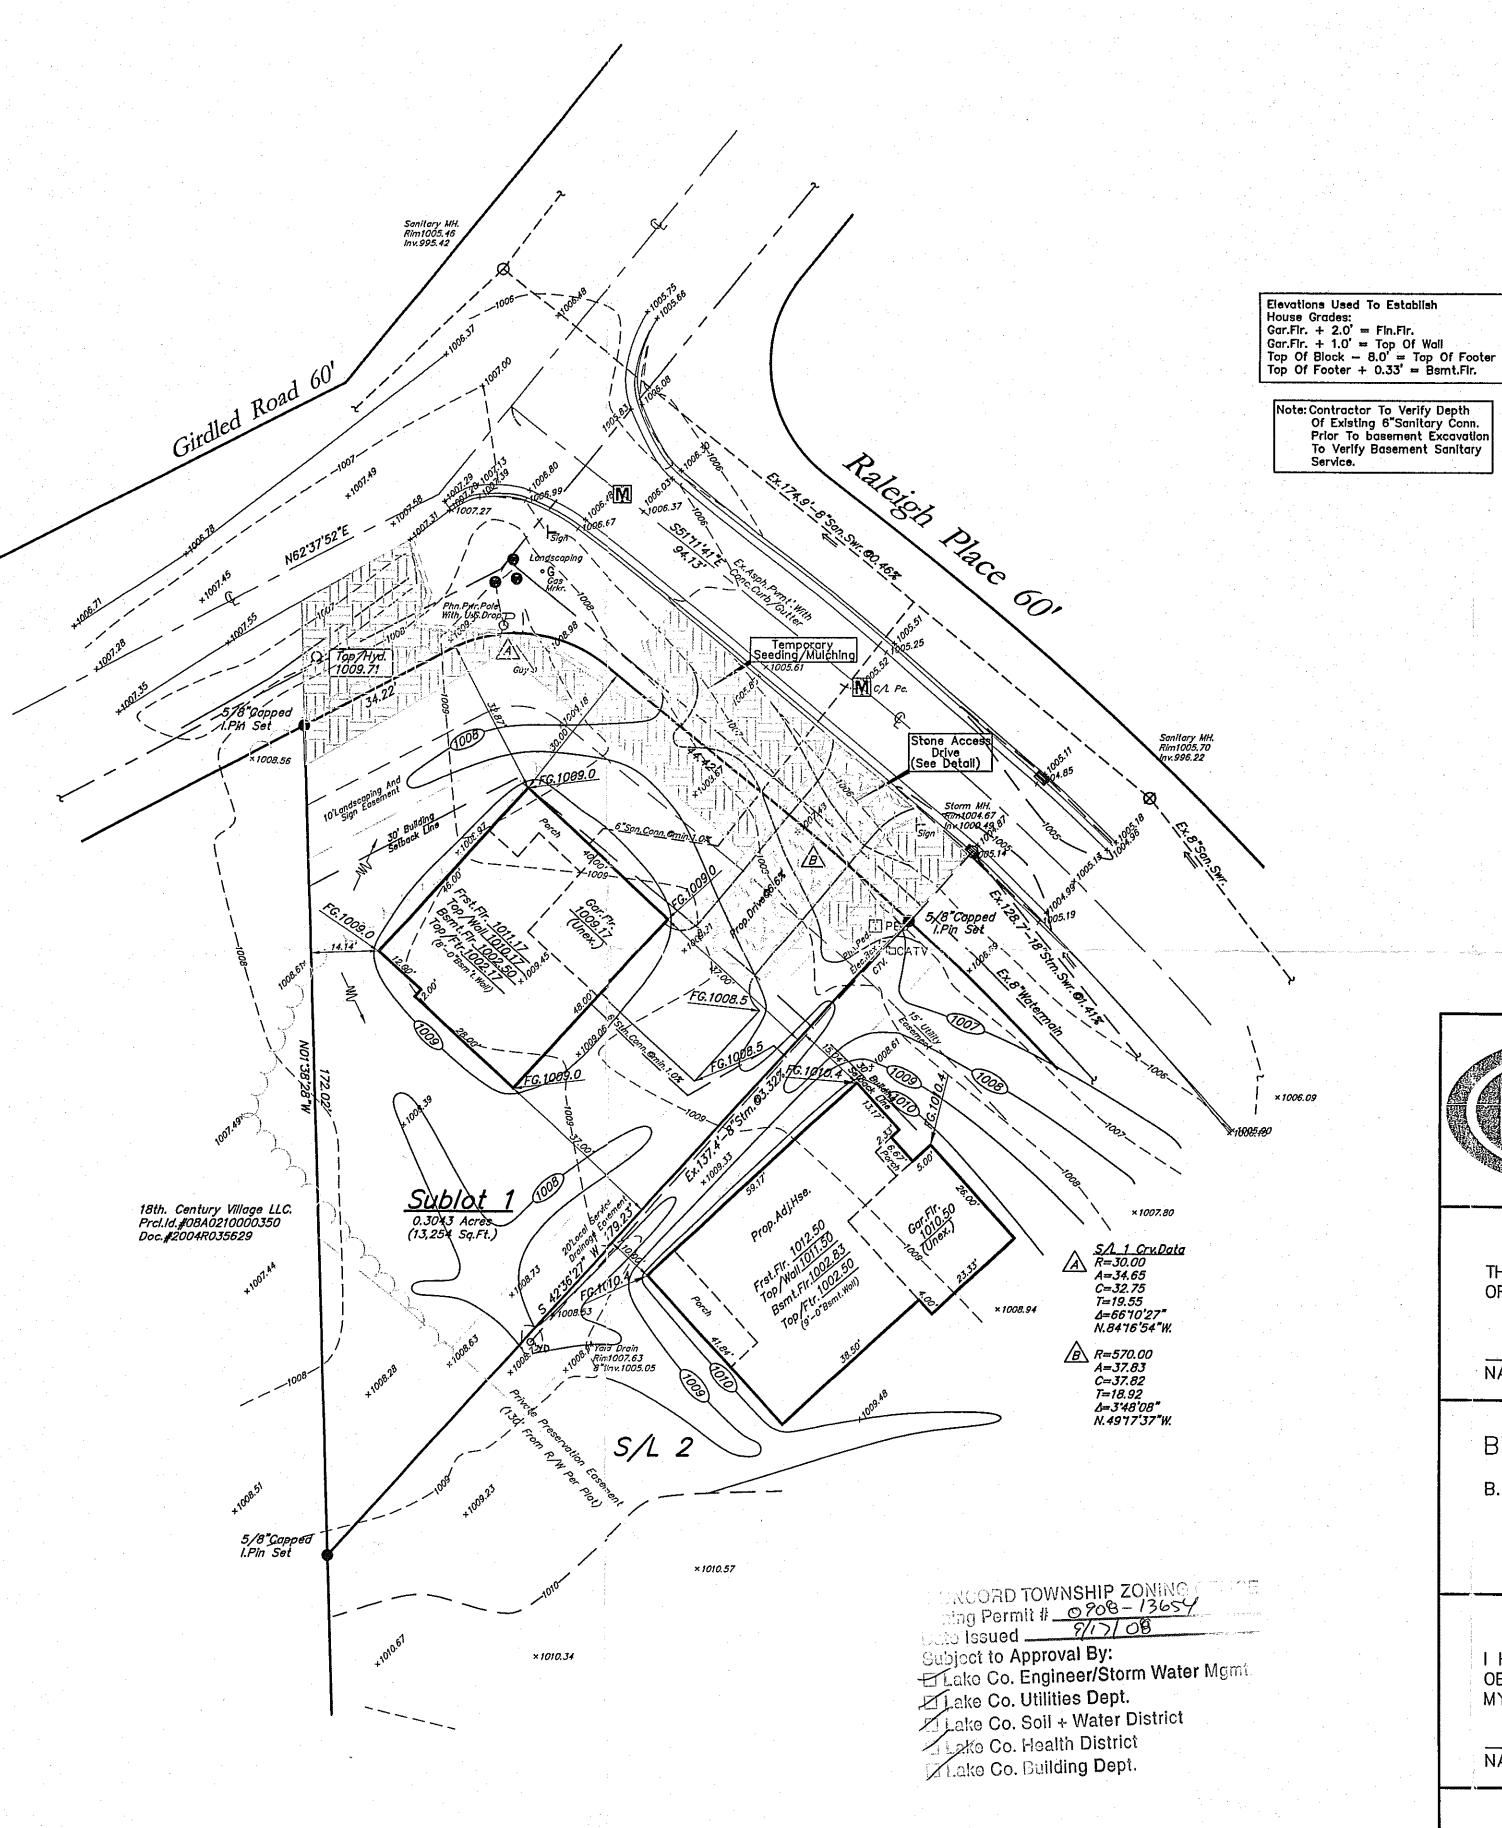


NOTE: THIS SURVEY SUBJECT TO CHANGE UPON

UNDERGROUND UTILITY INFORMATION

RECEIPT OF ANY ADDITIONAL AVAILABLE



GRAPHIC SCALE



ESTIMATED IMPERVIOUS AREA HOUSE: 0.04 Ac. DRIVE: 0.03 Ac. TOTAL: 0.07 Ac.

House Summary
2—Car, Side Entry, Left Hand
—See Architect Plans For
Complete House Dimensions.
—Utility Connections Per Plan;
Contractor To Verify Location
And Depth Of All Laterals.

NOTE -HOUSE DOWNSPOUTS TO BE CONNECTED TO EXIST. 6" STORM CONNECTION. -SUMP PUMP TO DISCHARGE TO


EXIST. 6" STORM CONNECTION.

-FINAL LOCATION OF DOWNSPOUTS
TO BE VERIFIED WITH ARCHITECTURAL PLANS.

I, THE UNDERSIGNED, HEREBY CERTIFY THAT THIS
TOPOGRAPHY, INDICATED BY 6", 1', OR 2' CONTOURS,
AND ELEVATIONS SHOWN HEREON, REPRESENT AN
ACTUAL FIELD SURVEY MADE BY ME ON THE 3rd.
DAY OF SEPTEMBER, 2008 AND THAT THE ELEVATIONS
WERE TAKEN AT APPROPRIATE INTERVALS AND THAT AS
OF THAT DATE, THEY EXISTED AS INDICATED HEREON.

Charles W. Szucs, P.E.56526

Site & Grade Hse., 9-16-08

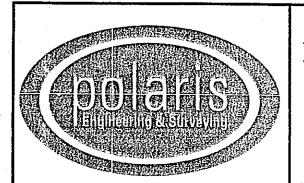

POLARIS ENGINEERING & SURVEYING, INC. 34600 CHARDON ROAD — SUITE D WILLOUGHBY HILLS, OHIO 44094 (440) 944-4433 (440) 944-3722 (Fax) www.polaris-es.com

DESIGN CERTIFICATION

THIS PLAN WAS PREPARED BY ME, AND IS CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

Chk Sz


9/15/08

BENCHMARK:

B.M. = T.B.M Set On <u>Top Of Hydrant</u>

Located <u>As Noted</u>

Elevation As Noted



"AS-BUILT" CERTIFICATION

I HEREBY CERTIFY THAT THE CIRCLED INFORMATION IS EXISTING AS OBTAINED ON THE SITE _____ AND IS CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.

JAMF.

B.R. Knez Construction, Inc.

Perry Township, Ohio 44081 (440)259-0087

3375 Blackmore Road

DATE

<u>Sublot 1</u> 18Th. Century Village Subdivision

Concord Twp., Lake County, Ohio

CONTRACT No.
07027

DATE: 9/16/08

SCALE: HOR. <u>1"=20'</u>

VERT._____
FILENAME: sublot 1.dwg

Stormwater Management Plan Approved as shown and/or noted JAMES R. GILLS, P.E. County Drainage Engineer