

### Erosion and Sediment Control Schedule

**Ingress-Egress**  
A stone access drive complete with under lying geo-textile fabric (20 feet wide and 50 feet long) for ingress and egress at the site shall be installed. This drive shall be the only entrance and exit to the site.

**Silt Fence**  
All silt fence shall be installed prior to any earthwork activities at the site in the locations shown on the site plan as well as along the front of any lot that slopes towards the street.

**Temporary Seeding**  
Disturbed areas of the site that are to remain idle for more than thirty (30) days shall be properly seeded and straw mulched within seven (7) days of completion of initial grading. Temporary seeding and mulching of a thirty (30) foot strip of the entire front of the lot shall be maintained on the site once initial grading is complete.


**Stabilization of critical areas within fifty (50) feet of any stream or wetland shall be complete within two (2) days of the disturbance if the site is to remain inactive for longer than fourteen (14) days.**

**Mulching**  
Straw-mulch shall be applied at a rate of 1 bale per every ten (10) feet of curb, at a width of thirty-(30) feet of the entire length of the lot. Wood chips may also be used but must be spread at a minimum depth of four inches over the thirty-foot width and must be accompanied by a properly installed silt fence.

**Maintenance**  
Erosion and sediment controls shall be inspected every seven (7) days or within 24 hours of a 0.5" or greater rainfall event. Necessary repairs shall be made at this time.

### Note:

All erosion and sediment control specifications, applications, and timeframes are based on the design and standards of "The Ohio Department of Natural Resources "Best Management Practices Manual" and can be found in the Lake County Erosion and Sediment Control Rules as adopted December 21, 1999.





125 East Erie Street  
Painesville, Ohio 44077  
Phone: (440) 350-2730  
Fax: (440) 350-2601  
WWW.LAKECOUNTYOHIO.ORG/8011

APPROVED  
MADISON TOWNSHIP ZONING  
DATE 2/17/06  
BY JF Z-2610 + 2611


Stormwater Management Plan  
Approved as shown and/or noted  
JAMES R. GILLS, P.E.  
County Drainage Engineer  
By J.S. Date 2/16/06  
25075

Seeding Date	Species	US 1/1000 ft <sup>2</sup>	% A.C.
March 1 to August 15	Grass	3	40%
	Timothy	1	40%
	Perennial Ryegrass	1	40%
	Annual Ryegrass	1	40%
August 15 to November 1	Grass	3	40%
	Timothy	1	40%
	Perennial Ryegrass	1	40%
	Annual Ryegrass	1	40%
November 1 to Spring Seeding	Grass	3	40%
	Timothy	1	40%
	Perennial Ryegrass	1	40%
	Annual Ryegrass	1	40%

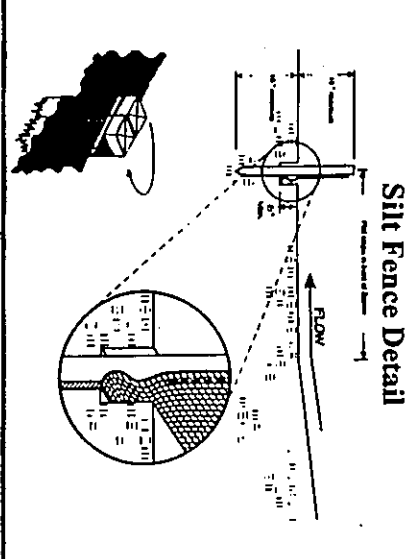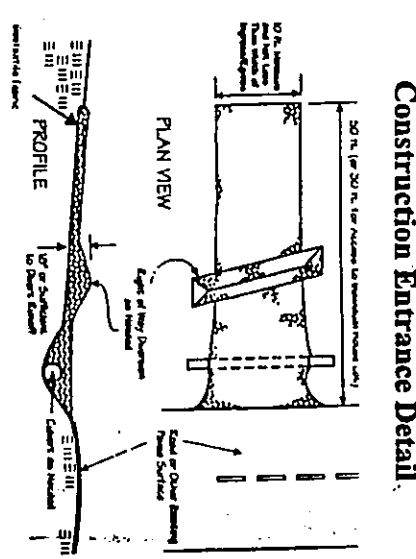

- NOTES :
1. The Contractor Shall Verify the Following Before Starting:  
Finish Floor Elevations and House Size.  
Location and elevation of existing utility connections.
  2. Contractor Shall Contact OUPPS at least 2 Working Days prior to construction, 1-800-362-2764.
  3. Use of Slog backfill or bedding material is prohibited.
  4. Drive Apron shall be 6" Concrete or 4" Asphalt (Min.).
  5. The Drive shall be 4" Concrete, Asphalt or Crushed Stone (Min.)  
Concrete and Asphalt driveways shall have a 4" aggregate subbase.
  6. Roof Downspouts are to be outletted to splashblocks.
- "I, the undersigned hereby certify that the topography indicated by contours and elevations shown herein represents an actual field survey made by me in August, 2005, and that the elevations were taken at appropriate intervals and that as of that date they existed as indicated herein."

David A. Rapp  
2/6/06  
Reg. No.

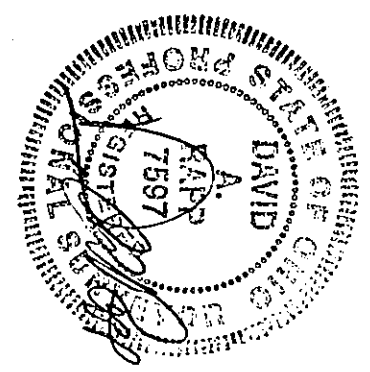

**DAVID RAPP SERVICES**  
3406 DAYTON ROAD MADISON, OHIO 44057  
440-428-1686

DATE: AUGUST 2005  
DRAWN BY: DAR  
CHECKED BY: DAR  
APPROVED BY: DAR  
P.S. No. 7597

3301 Haines Rd  
Madison 44057  
94057  
REALTY BUILDERS  
SL 1 MADISON MEADOWS SUBDIVISION  
HAINES ROAD, MADISON TOWNSHIP

SITE PLAN  
25075