

Erosion and Sediment Control Schedule

A stone access drive complete with under lying geo-textile fabric (20 feet wide and 50 feet long) for ingress and egress at and exit to the site.

at the site in the locations shown on the site plan as well as along the front of any lot that slopes towards the street.

Temporary Seeding
Disturbed areas of the site that are to remain idle for more than twenty—one(21) days shall be properly seeded and straw mulched within seven(7) days of completion of intitial grading.

Temporary seeding and mulching as a thirty(30) foot strip of the entire front of the lot shall be maintained on the site once initial grading is complete.


Silt Fence
A silt fence shall be installed prior to any earthwork activities


Stabilization of critical areas within fifty(50) feet of any stream or wetland shall be complete within two(2) days of the disturbance if the site is to remain inactive for longer than fourteen(14) days.


Mulching
Straw—mulch shall be applied at a rate of 1 bale per every ten
(10) feet of curb, at a width of thirty(30) feet to the entire
length of the lot. Wood chips may also be used but must be
spread at a minimum depth of four inches over the thirty—foot
width and must be accompanied by a properly installed silt


Erosion and sediment controls shall be inspected every seven(7) days or within 24 hours of a 0.5" or greater rainfall event.

Necessary repairs shall be made at this time.

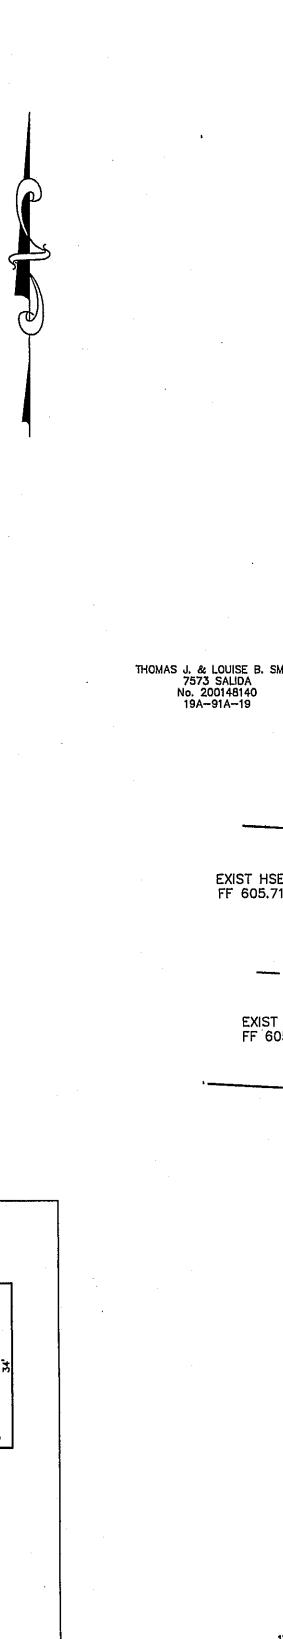

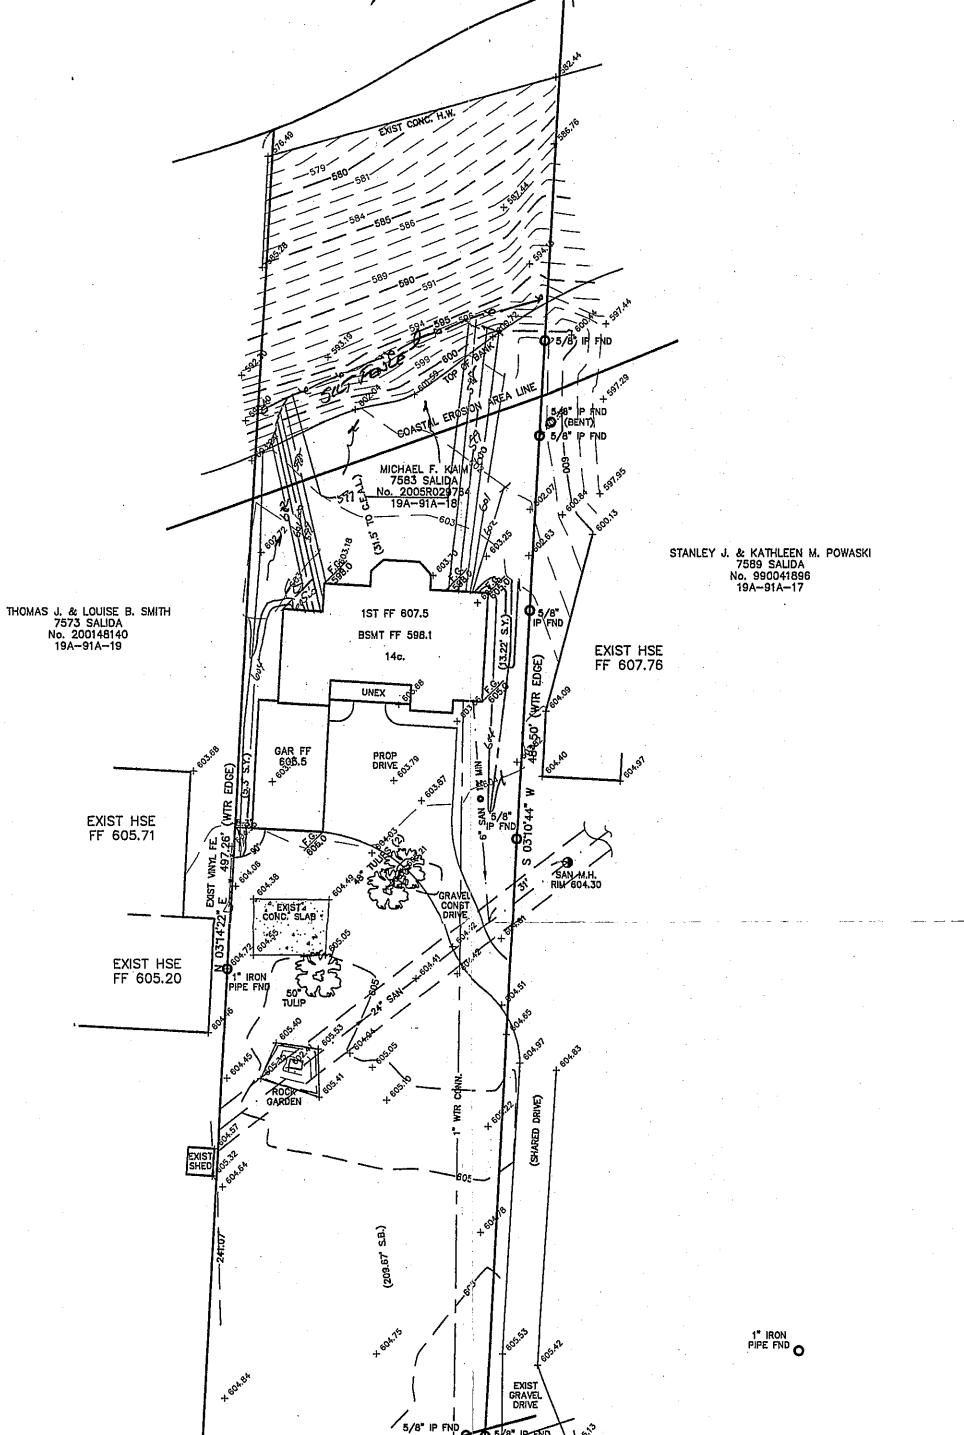

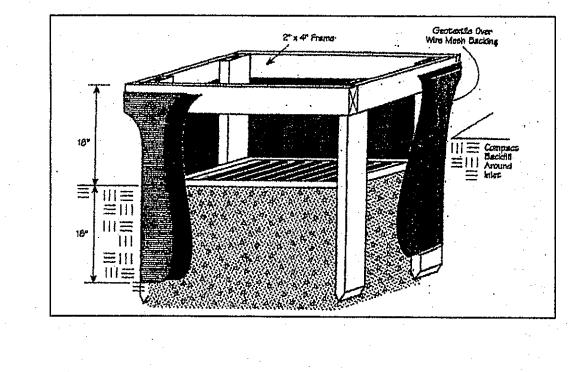

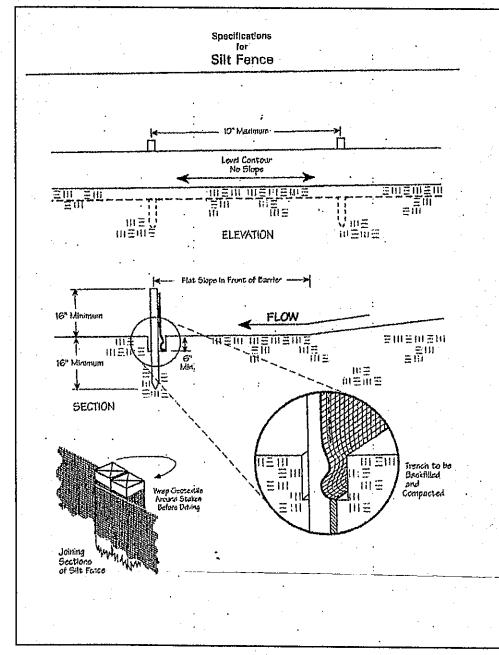

5/8" O

1" IRON O

GRAPHIC SCALE (IN FEET) 1 inch = 30 ft.

Stormwater Management Plan
Approved as shown and/or noted
JAMES R. GILLS, P.E. County Drainage Engineer

TBM - SANITARY MANHOLE ELEV - 604.41

EXISTING UTILITIES NOTE:
THE SIZE AND LOCATION, BOTH HORIZONTAL AND VERTICAL
OF THE UNDERGROUND UTILITIES SHOWN HEREON, HAVE BEEN
OBTAINED BY A SEARCH OF AVAILABLE RECORDS.
VERIFICATION BY FIELD OBSERVATION HAS BEEN CONDUCTED
WHERE PRACTICAL, HOWEVER, BABCOCK, JONES AND ASSOCIATES
INC. DOES NOT GUARANTEE THE COMPLETENESS NOR ACCURACY
THEREOF.



1ST FF 607.5

1"=20'

i, the undersigned hereby certify that his topography indicated by 6", 1', or 2 ontours, and elevations shown hereon epresent an actual field survey made to ne on the Zlott day of OCT ,20 0 ind that the elevations were taken at ippropriate intervals and that as of that

ate they existed as indicated hereon."

APPROVED CT CONSULTANTS, INC

BABCOCK, JONES AND ASSOCIATES, INC. CIVIL ENGINEERS - SURVEYORS - LAND PLANNERS PAINESVILLE OHIO 44077

		e e						
	DATE	10/28/05						
	DESIGN BY	H.J.	1					
	DRAWN BY	B.P.						
	APPROVED BY	H.J.	1				7583	
	CREW CHIEF	W.B.	1 N	ENTOR	ON	THE		

SITE PLAN MICHAEL KAIM

LAKE COUNTY

1"=30' 05-230 7583 SALIDA ROAD (P.P.# 19A-91A-18)

STATE OF OHIO

BY CHK'D REV NO. DESCRIPTION 4/13/06 B.P. ADDED HOUSE B.P. H.J. 4/13/06 REVISED DRIVE H.J. B.P. 4/17/06 MOVED HSE BACK 12'

AR FF