


*Proposed Site Plan  
for  
Barr Brothers Construction*

S/L 278 Lake Erie Shores Phase 4 Subdivision  
Vol. -, Pg. - (Not Recorded 12/1/05)

Being Part of Lot 4, Tract 2  
Painesville Township  
County of Lake, State of Ohio  
December 1st, 2005

THIS SITE PLAN WAS DRAWN ON DECEMBER 1st, 2005

Stormwater Management Plan  
Approved as shown and/or noted  
JAMES R. GILLS, P.E.  
County Drainage Engineer  
L.S. Date 12/3/05  
By \_\_\_\_\_

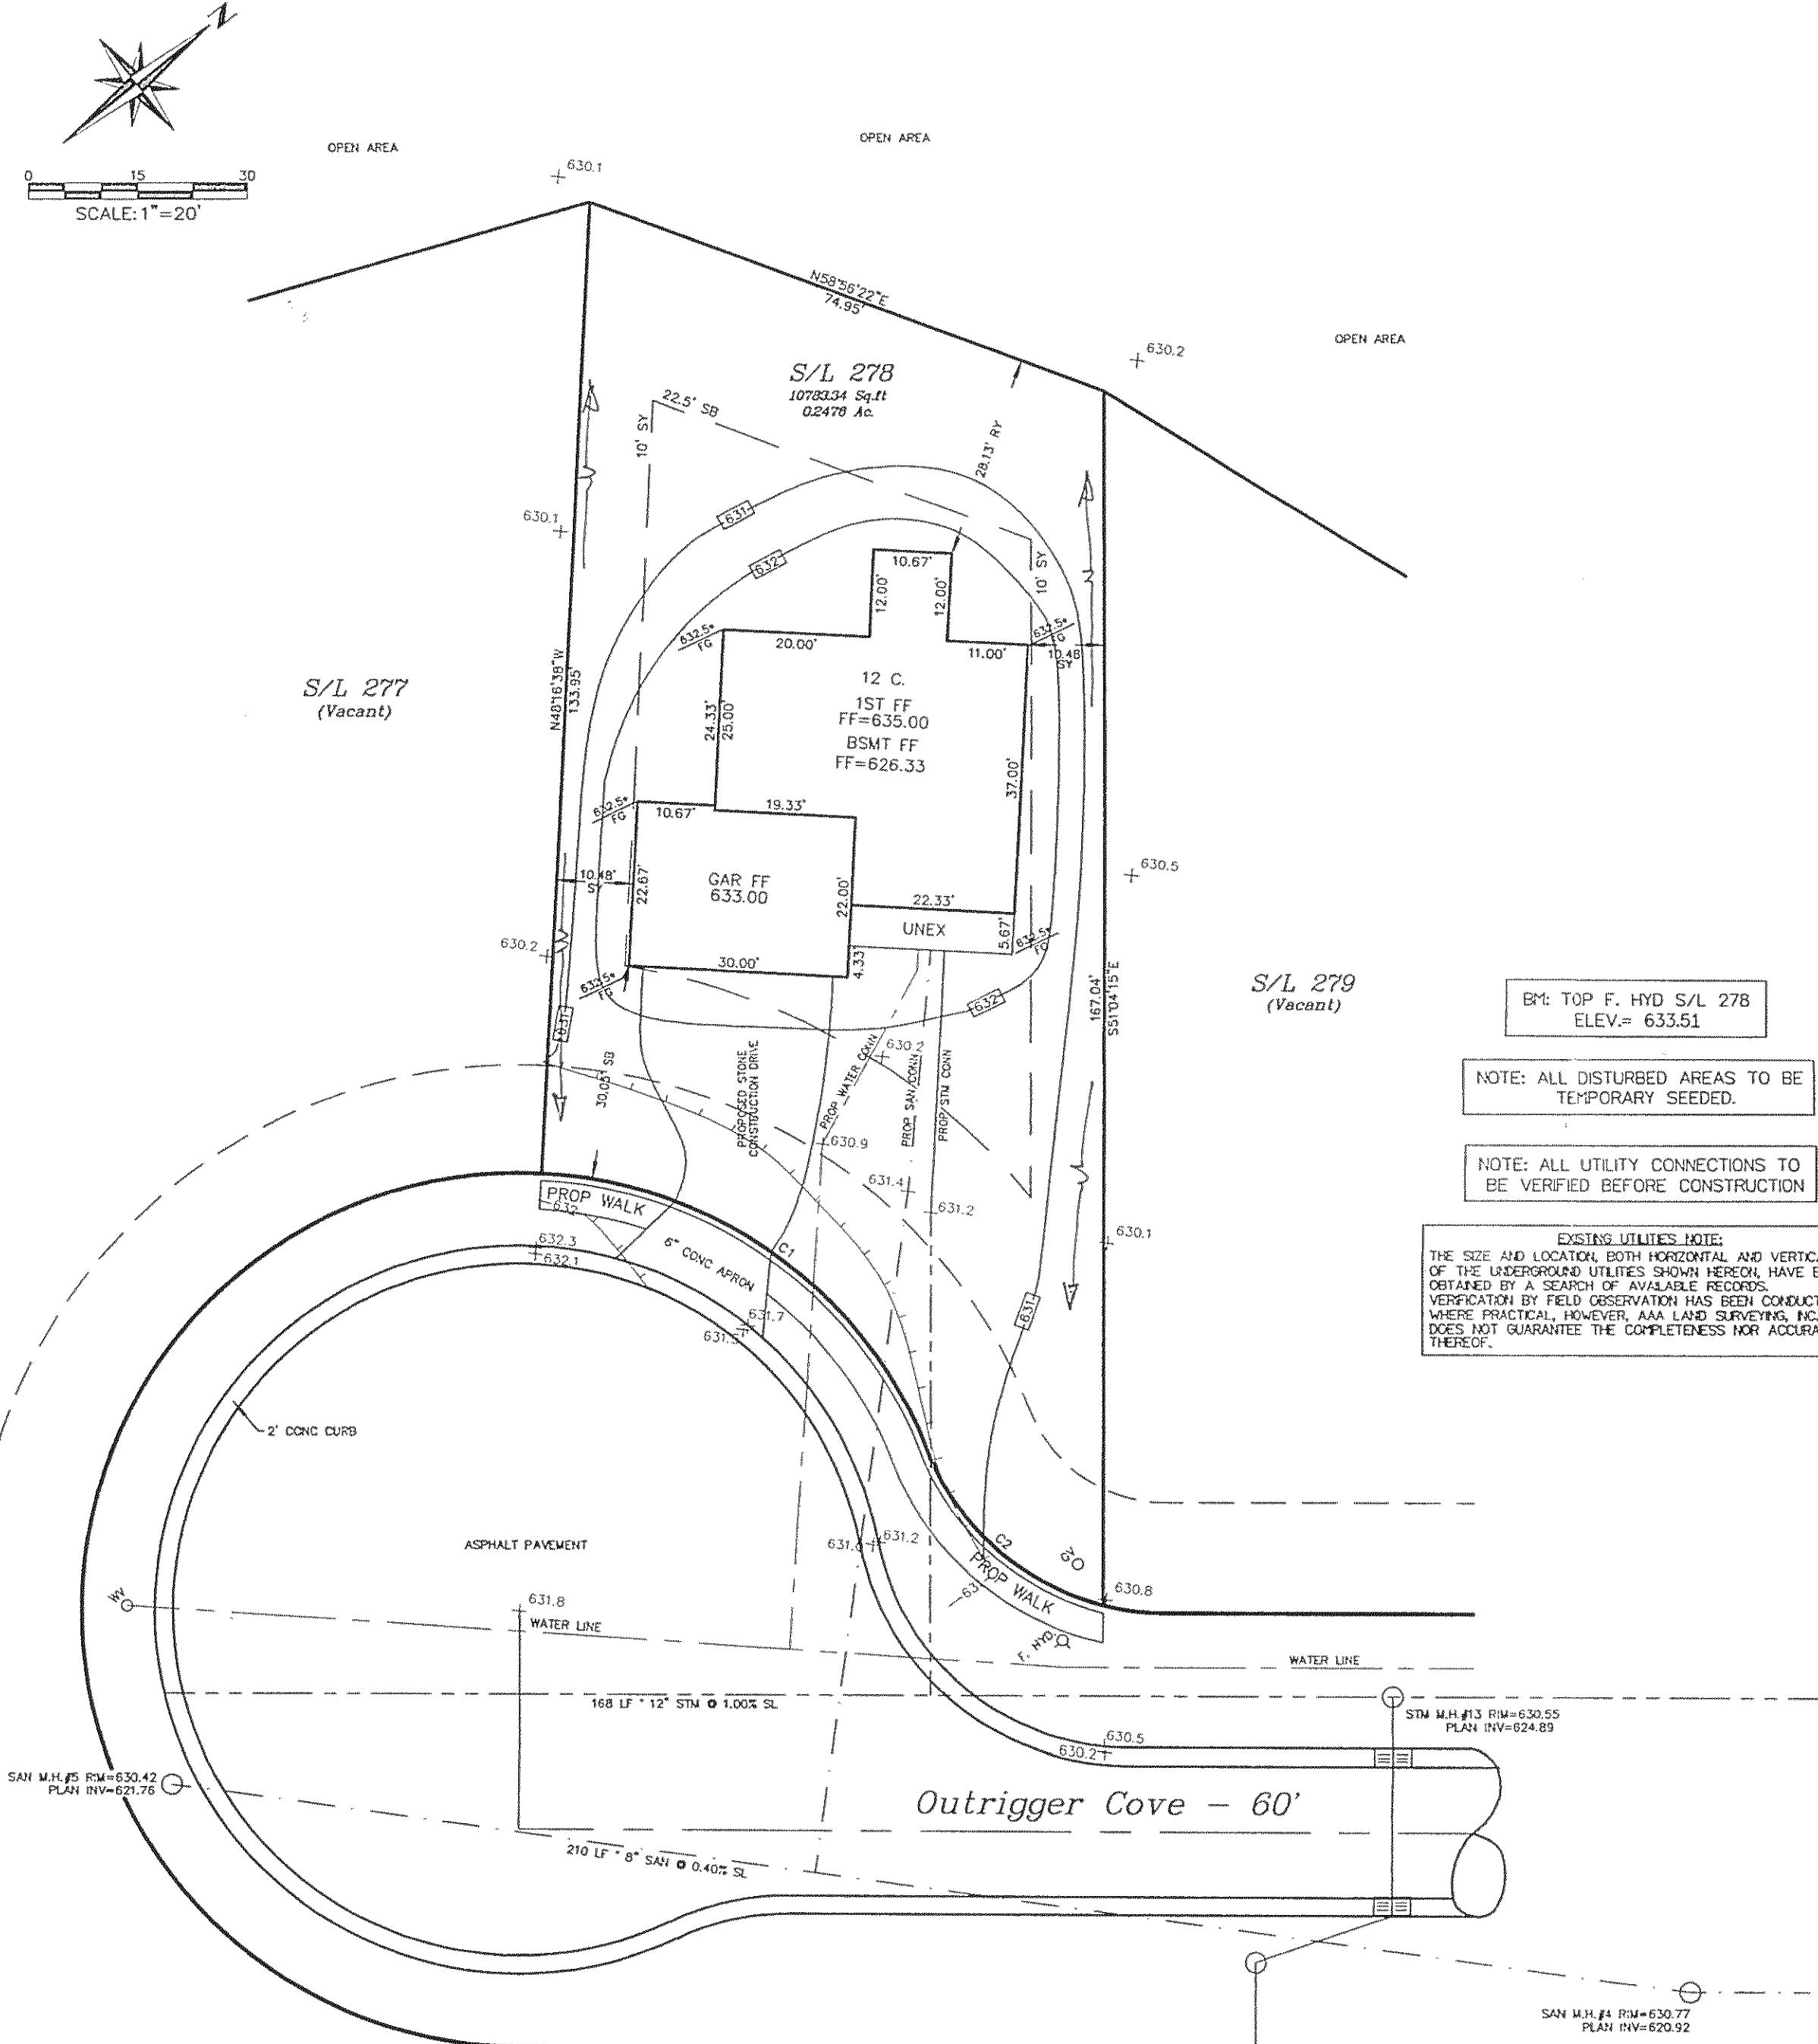

*Erosion and Sediment  
Control Site Plan*

**Erosion and Sediment Control Schedule**

**Ingress-Egress**

A stone access drive complete with under lying geo-textile fabric (20 feet wide and 50 feet long) for ingress and egress at the site shall be installed. This drive shall be the only entrance and exit to the site.

**Silt Fence**

All silt fence shall be installed prior to any earthwork activities at the site in the locations shown on the site plan as well as along the front of any lot that slopes towards the street.

**Temporary Seeding**

Disturbed areas of the site that are to remain idle for more than Twenty-one (21) days shall be properly seeded and straw mulched within seven (7) days of completion of initial grading. Temporary seeding and mulching of a thirty (30) foot strip of the entire front of the lot shall be maintained on the site once initial grading is complete.

Stabilization of the critical areas within fifty (50) feet of any stream or wetland shall be completed within two (2) days of the disturbance if the site is to remain inactive for longer than fourteen (14) days.

**Mulching**

Straw-mulch shall be applied at a rate of 1 bale per every ten (10) feet of curb, at a width of thirty (30) feet of the entire length of the lot. Wood chips may also be used but must be spread at a minimum depth of four inches over thirty-foot width and must be accompanied by a proper installed silt fence.

**Maintenance**


Erosion and sediment controls shall be inspected every seven (7) days or within 24 hours of a 0.5 or greater rainfall event. Necessary repairs shall be made at this time.

**Note**


All erosion and sediment control specifications, applications, and timetables are based off the descriptions and standards of the Ohio Department of Natural Resources "Riparian and Land Development Manual" and can be found in the Lake County Erosion and Sediment Control Rules as adopted December 21, 1999.

The specified erosion and sediment control standards are general guidelines and shall not limit the right of the county to impose, at any time, additional, more stringent requirements. Nor shall the standards limit the right of the county to.

**Construction Entrance Detail**

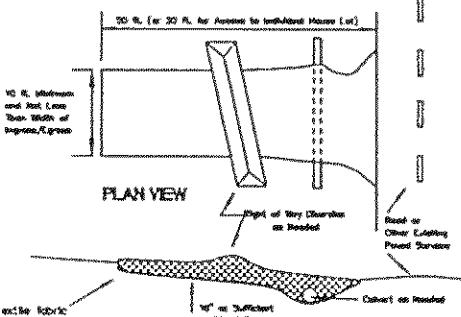

**Silt Fence Detail**

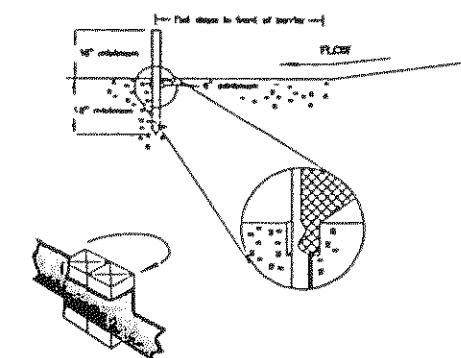

**Temporary Seeding Specifications**

Seeding Dates	Species	Lb./1,000ft. <sup>2</sup>	Per Acre
March 1 to August 15	Grass	3	4 bushel
Total Fences	1	40 lb.	
Annual Programs	1	40 lb.	
Perennial Programs	1	40 lb.	
Total Fences	1	40 lb.	
Annual Programs	1	40 lb.	
August 15 to November 1	Pine	3	2 bushel
Total Fences	1	40 lb.	
Annual Programs	1	40 lb.	
Perennial Programs	1	40 lb.	
Total Fences	1	40 lb.	
Annual Programs	1	40 lb.	
November 1 to Spring Seeding	Use straw, hay, mulching practices or dormant seeding.		
	Note:		Other approved seed species may be substituted.


**Lake County Soil + Water Conservation District**

125 East Erie Street Phone: (440) 350-2730  
Painesville, Ohio 44077 Fax: (440) 350-2601

[www.lakecountyohio.org/soil](http://www.lakecountyohio.org/soil)

"I, the undersigned hereby certify that this topography indicated by 6", 1', or 2' contours, and elevations shown hereon represent an actual field survey made by me on the 30TH day of NOV, 2005 and that the elevations were taken at appropriate intervals and that as of that date they existed as indicated hereon."

Keith B. Jones  
Name: *[Signature]* Reg. No.: 7794

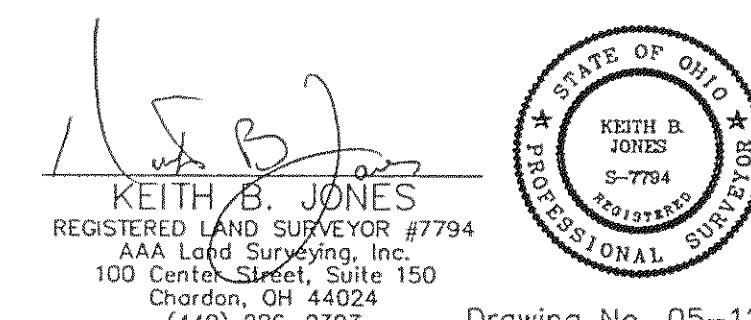

APPROVED  
Painesville Township  
Zoning Department  
*[Handwritten Signature]*  
12/3/05

Drawing No. 05-129