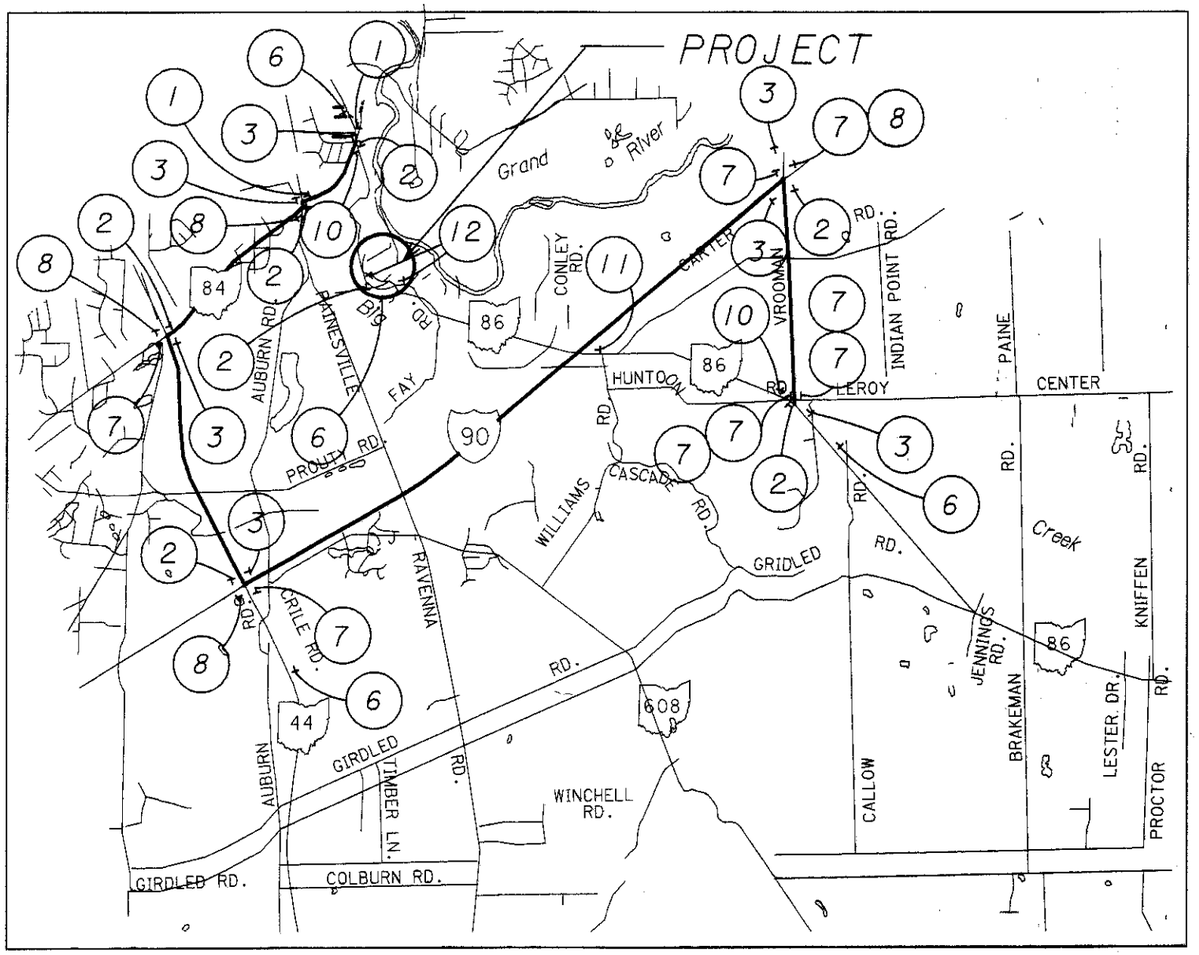

SIGNED DETOUR ROUTE

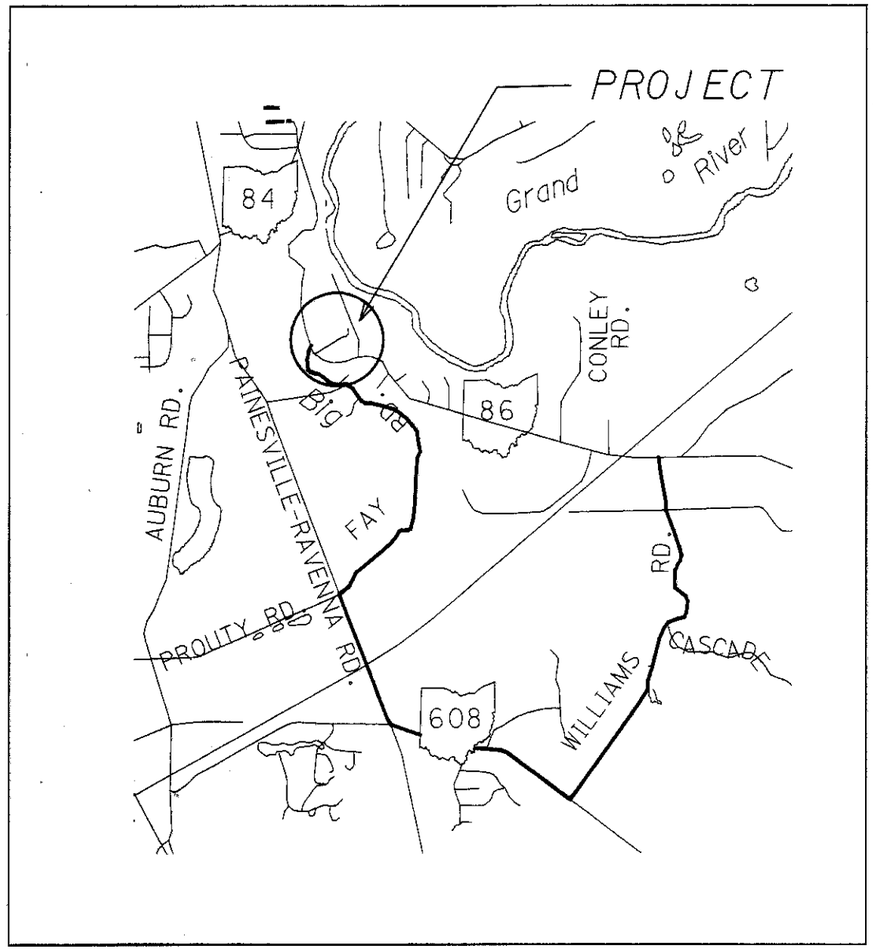

UNSIGNED LOCAL DETOUR ROUTE

NOTICE OF CLOSURE SIGNS, AS DETAILED IN THESE PLANS, SHALL BE ERECTED BY THE CONTRACTOR AT LEAST TWO WEEKS IN ADVANCE OF THE SCHEDULED ROAD CLOSURE. THE SIGNS SHALL BE ERECTED ON THE RIGHT HAND SIDE OF THE ROAD FACING TRAFFIC. THEY SHALL BE PLACED SO AS NOT TO INTERFERE WITH THE VISIBILITY OF ANY PERMANENT SIGNS. THE SIGN SHOULD BE ERECTED AT THE POINT OF CLOSURE.

THE CONTRACTOR SHALL NOTIFY THE FOLLOWING AGENCIES IN WRITING A MINIMUM OF TWO WEEKS PRIOR TO THE CLOSING OF THE ROADWAY:

1. ODOT DISTRIC 12 PUBLIC INFORMATION OFFICER (216)581-2333 EXT.244
2. ODOT DISTRICT 12 ROADWAY SERVICES MANAGER (216)581-2333 EXT. 308
3. CONCORD TOWNSHIP
4. PAINESVILLE TOWNSHIP SCHOOL DISTICT
5. CONCORD TOWNSHIP FIRE DEPARTMENT
6. LAKE COUNTY SHERIFF

PAYMENT FOR THIS WORK SHALL BE INCLUDED IN THE LUMP SUM BID FOR ITEM 614 - MAINTAINING TRAFFIC AND SHALL INCLUDE FURNISHINGS, ERECTING, MAINTAINING AND REMOVING THE SIGNS INCLUDING THE SUPPORTS.

CALCULATED KAS
CHECKED LDH

DETOUR ROUTE SR-86

LAKE COUNTY LAK-86-2.33

8A
18

PLOTTED BY: jgrmovse
PLOTTED FROM: i:\users\ksarli\pid17995\17995mda.dgn
PLOT SUBMITTED: 11-NOV-1998 07:18
17995MDA.DGN