


SEQUENCE OF CONSTRUCTION

- STAGE 1 - CONSTRUCTION:** SHORT TERM CONDITIONS DURING *OFF-PEAK WEEKDAY TRAFFIC PERIODS OR WEEKENDS
 REMOVE TEMPORARY PAVEMENT AND PLACE PROPOSED RESURFACING ASPHALT MATERIAL
 M.O.T. : USE SINGLE LANE DIRECTIONAL ZONE WITH CONES AND FLAGGERS ON EACH SIDE OF BRIDGE OR SINGLE LANE DIRECTION ZONE ON ONE SIDE OF THE BRIDGE WITH CONES BETWEEN THE LANES AND FLAGGERS AT SIGNALIZED INTERSECTIONS. ALL LANES ARE TO BE OPEN DURING WEEKDAY AM AND PM PEAK TRAFFIC PERIODS
- STAGE 2 - CONSTRUCTION:** INSTALL PROPOSED CONCRETE MEDIAN
 M.O.T. : AS PER THIS PLAN
- STAGE 3 - CONSTRUCTION:** SHORT TERM CONDITIONS DURING *OFF-PEAK WEEKDAY TRAFFIC PERIODS OR WEEKENDS
 PLANE EXISTING ROADWAY SURFACE AND INSTALL ASPHALT SURFACE COURSE
 M.O.T. : SAME AS FOR STAGE 1 OPERATIONS

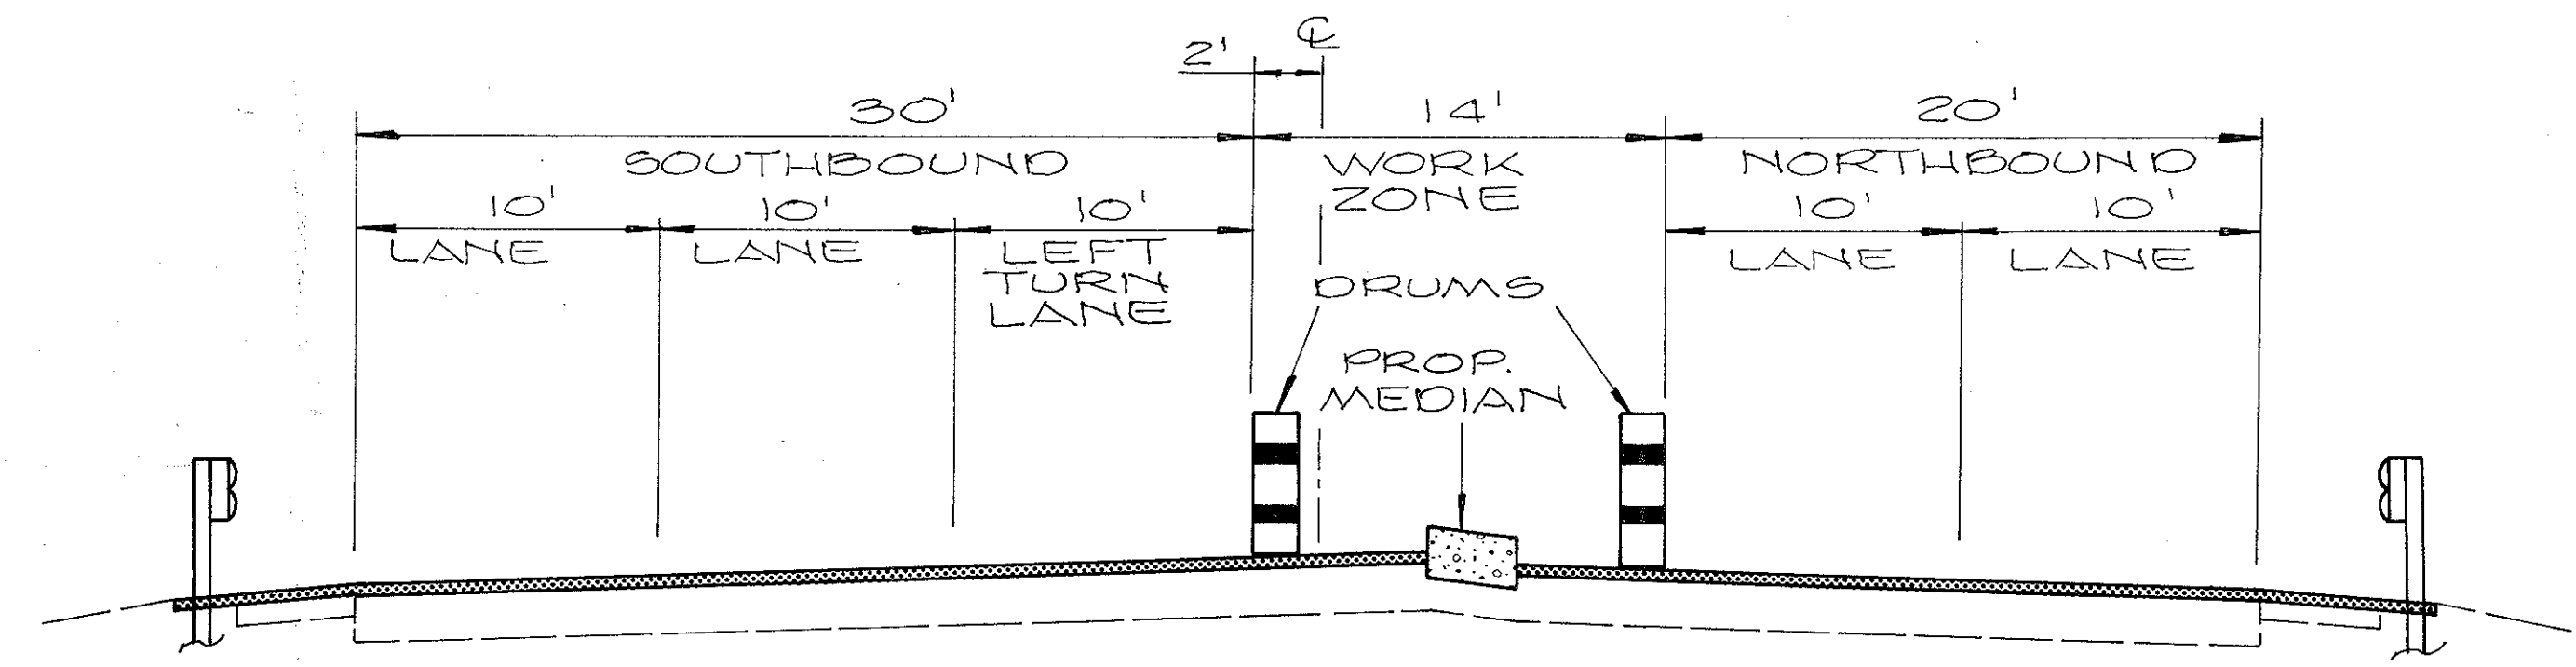

DRUM SPACING AT 25' CENTERS
ALONG BOTH SIDES OF WORK ZONE

SECTION A-A

- LEGEND**
- ① TEMPORARY LANE LINE
 - ② TEMPORARY EDGE LINE
 - ③ TEMPORARY CHANNELIZING LINE
 - ④ BLANK
 - ⑤ TEMPORARY ARROW
 - ⑥ TEMPORARY STOP LINE
 - ▭ PLANING
 - ▨ RESURFACING
- * 9:00 A.M. TO 3:00 P.M.

