CALC. BY	LME
DATE	4/90
CHKD. BY	DJW
DATE	4/90

LAK 306 – 7.12

OHIO

FHWA REGION 5

110 / 452

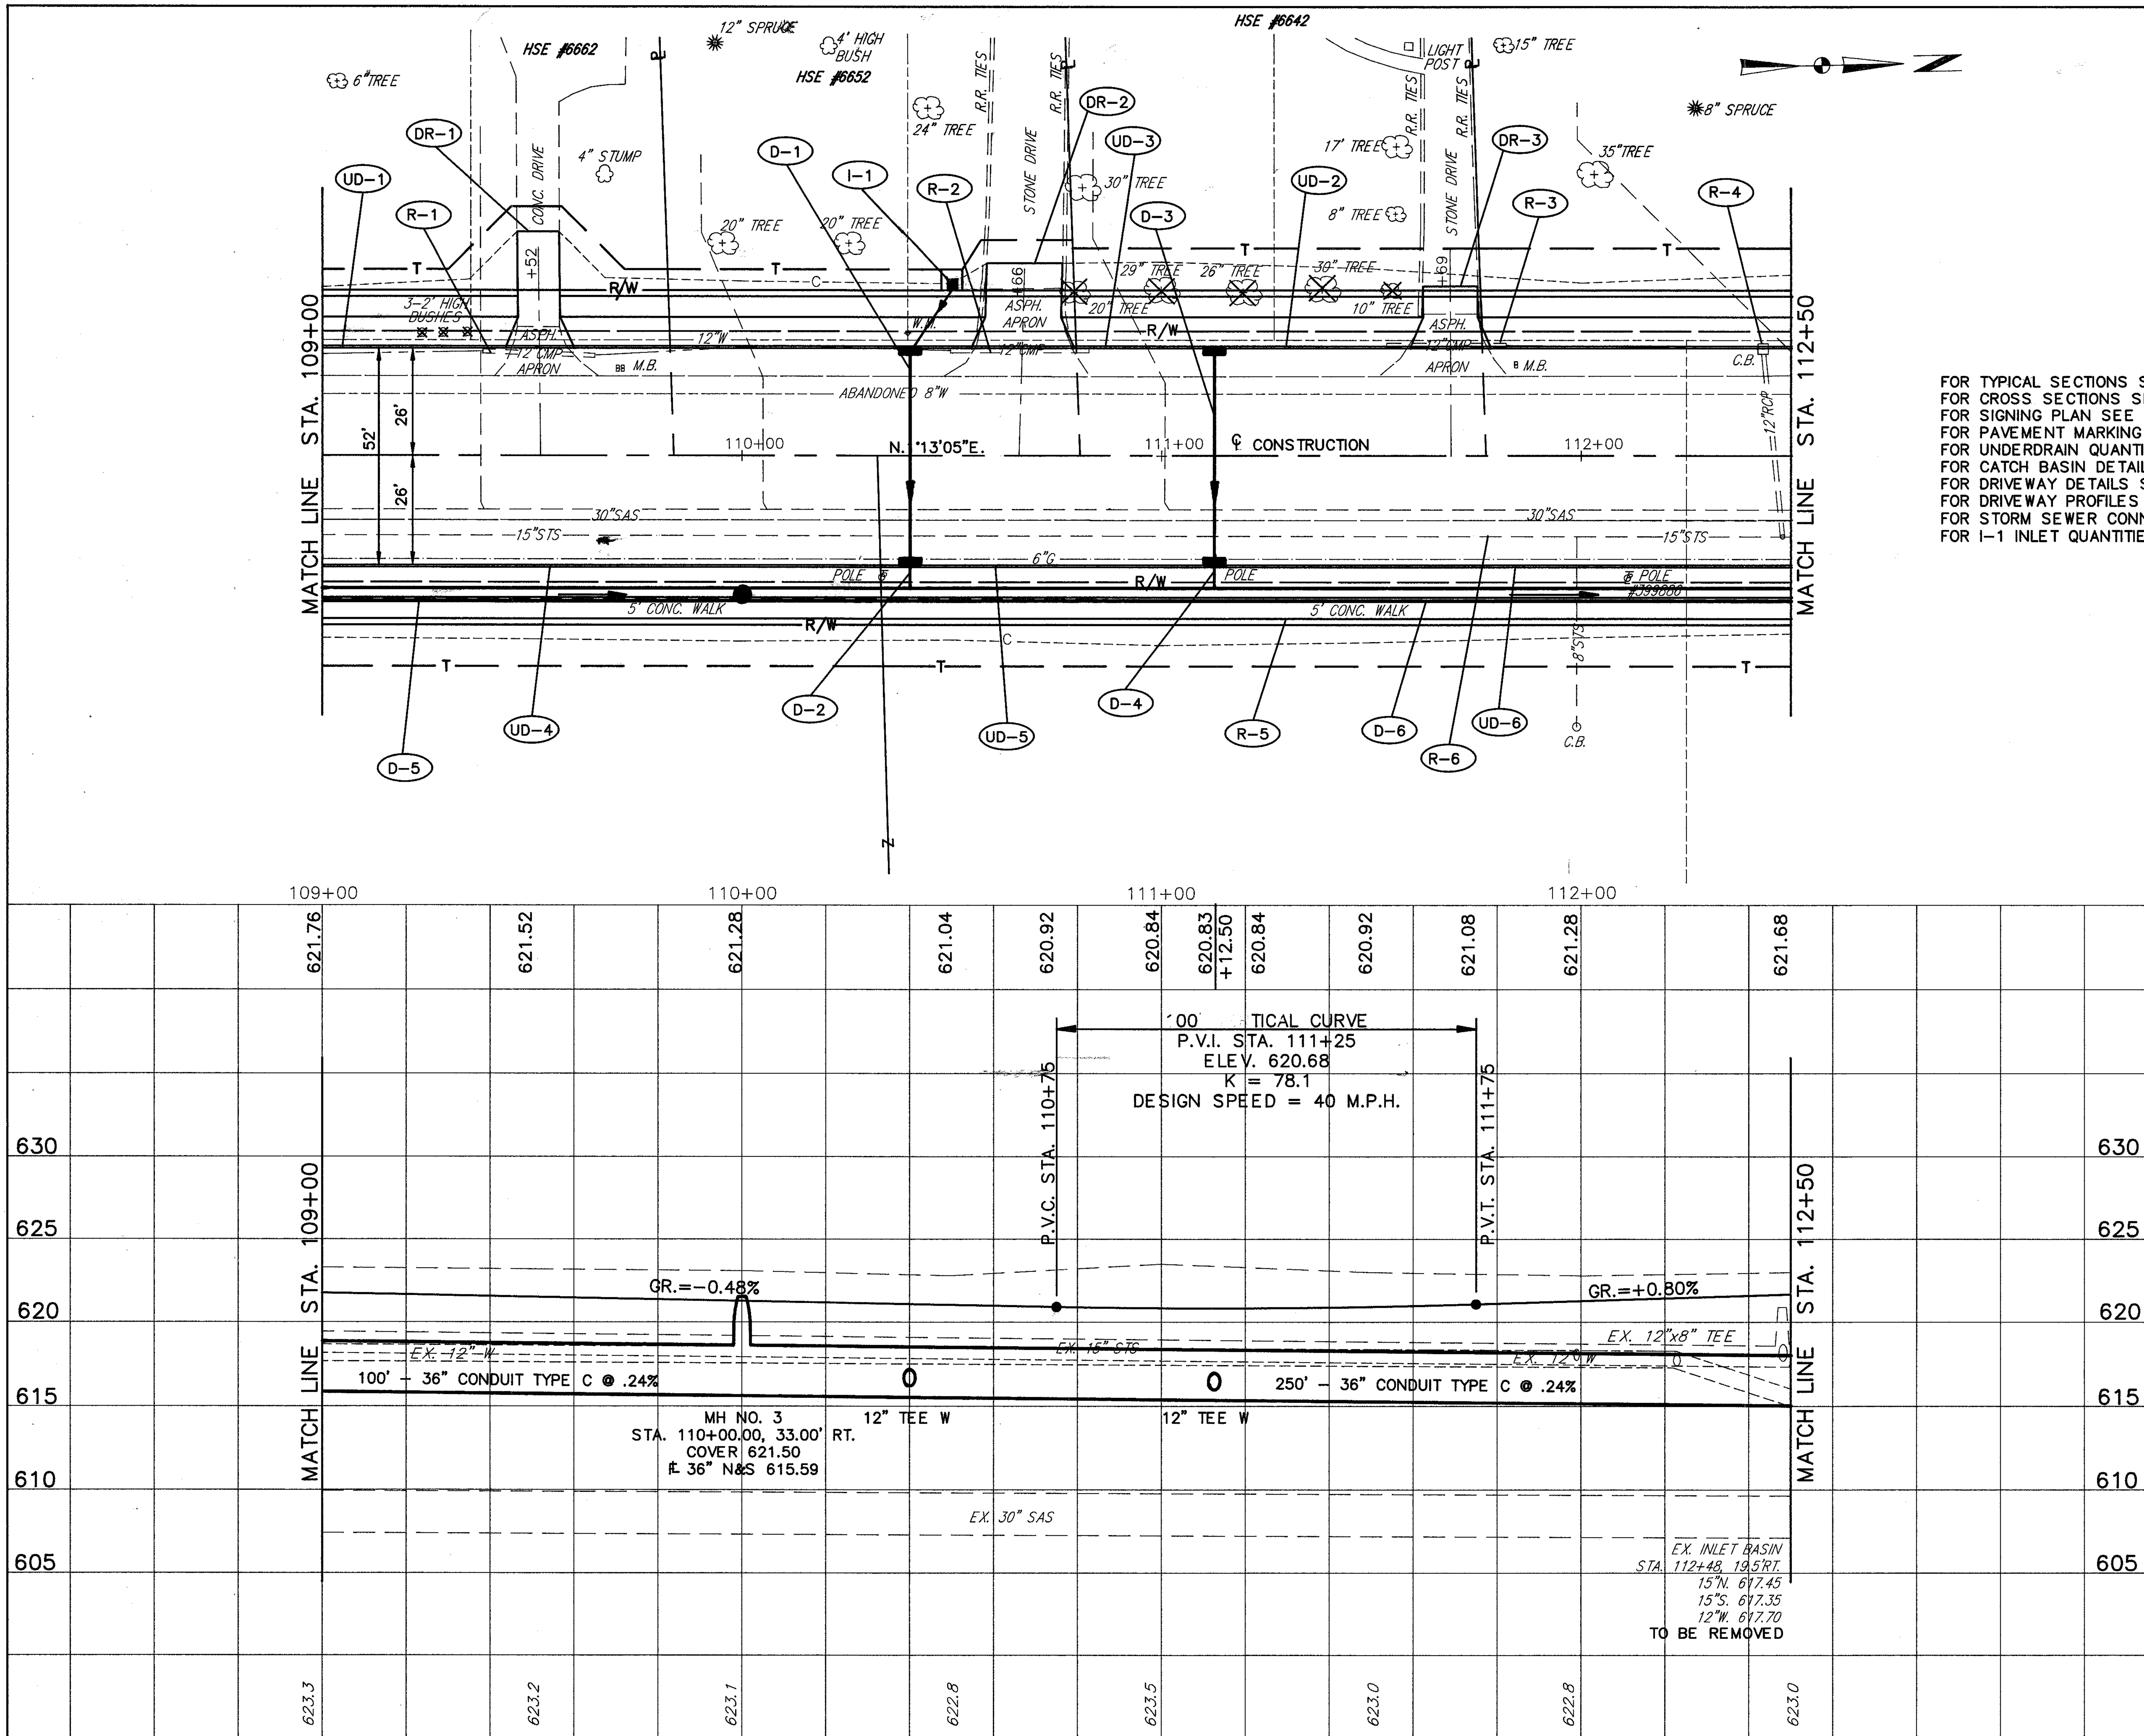

FOR TYPICAL SECTIONS SEE SHEET 6
FOR CROSS SECTIONS SEE SHEET 193-196
FOR SIGNING PLAN SEE SHEET 363-365
FOR PAVEMENT MARKING DETAILS SEE SHEET 352-353
FOR UNDERDRAIN QUANTITIES SEE SHEET 52-55
FOR CATCH BASIN DETAILS SEE SHEET 323
FOR DRIVEWAY DETAILS SEE SHEET 333-334
FOR DRIVEWAY PROFILES SEE SHEET 382-383
FOR STORM SEWER CONNECTION SCHEDULE SEE SHEET 68-70
FOR I-1 INLET QUANTITIES SEE SHEET 82

ROADWAY		202 PIPE REMOVED (24" & UNDER)	202 CATCH BASIN REMOVED	202 WALK REMOVED	
REF.	LOCATION	L.F.	EACH	S.F.	
R-1	STA. 109+38.00 TO STA. 109+66.00, 25' LT.	28			
R-2	STA. 110+50.00 TO STA. 110+83.00, 26' LT.	33			
R-3	STA. 111+53.00 TO STA. 111+82.00, 27' LT.	29			
R-4	STA. 112+42.00 27' LT TO 112+47.00 19' RT.	47	1		
R-5	STA. 109+00.00 TO STA. 112+50.00, RT.			1750	
R-6	STA. 109+00.00 TO STA. 112+50.00, 18' RT.	350			
TOTALS		487	1	1750	

DRAINAGE & SANITARY

	ITEM	UNIT	D-1 STA. 110+40.00, 26.00' LT. TO STA. 110+40.00, 26.00' RT.	D-2 STA. 110+40.00, 26.00' RT. TO STA. 110+40.00, 33.00' RT.	D-3 STA. 111+12.50, 26.00' LT. TO STA. 111+12.50, 26.00' RT.	D-4 STA. 111+12.50, 26.00' RT. TO STA. 111+12.50, 33.00' RT.	D-5 STA. 109+00.00, 33.00' RT. TO STA. 110+00.00, 33.00' RT.	D-6 STA. 110+00.00, 33.00' RT. TO STA. 112+50.00, 33.00' RT.	TOTALS
	TEE 36" X 12" X 36"	E.A.						2	2
604	CATCH BASIN NO. 3A AS PER PLAN	E.A.	1	1					2
604	CATCH BASIN NO. 3 AS PER PLAN	E.A.			1	1			2
604	MANHOLE NO. 3	E.A.						1	1
603	36" CONDUIT, TYPE C 706.02	L.F.					100	250	350
603	12" CONDUIT, TYPE C 706.02	L.F.		7		7			14
603	12" CONDUIT, TYPE B 706.02	L.F.	52		52				104