CALC. BY	J.C. DATE 1/13/84
CHKD. BY	M.S. DATE 3/6/84

LAK - 535 - 0.42

HIGH STREET / WATER STREET

OHIO | FHWA REGION

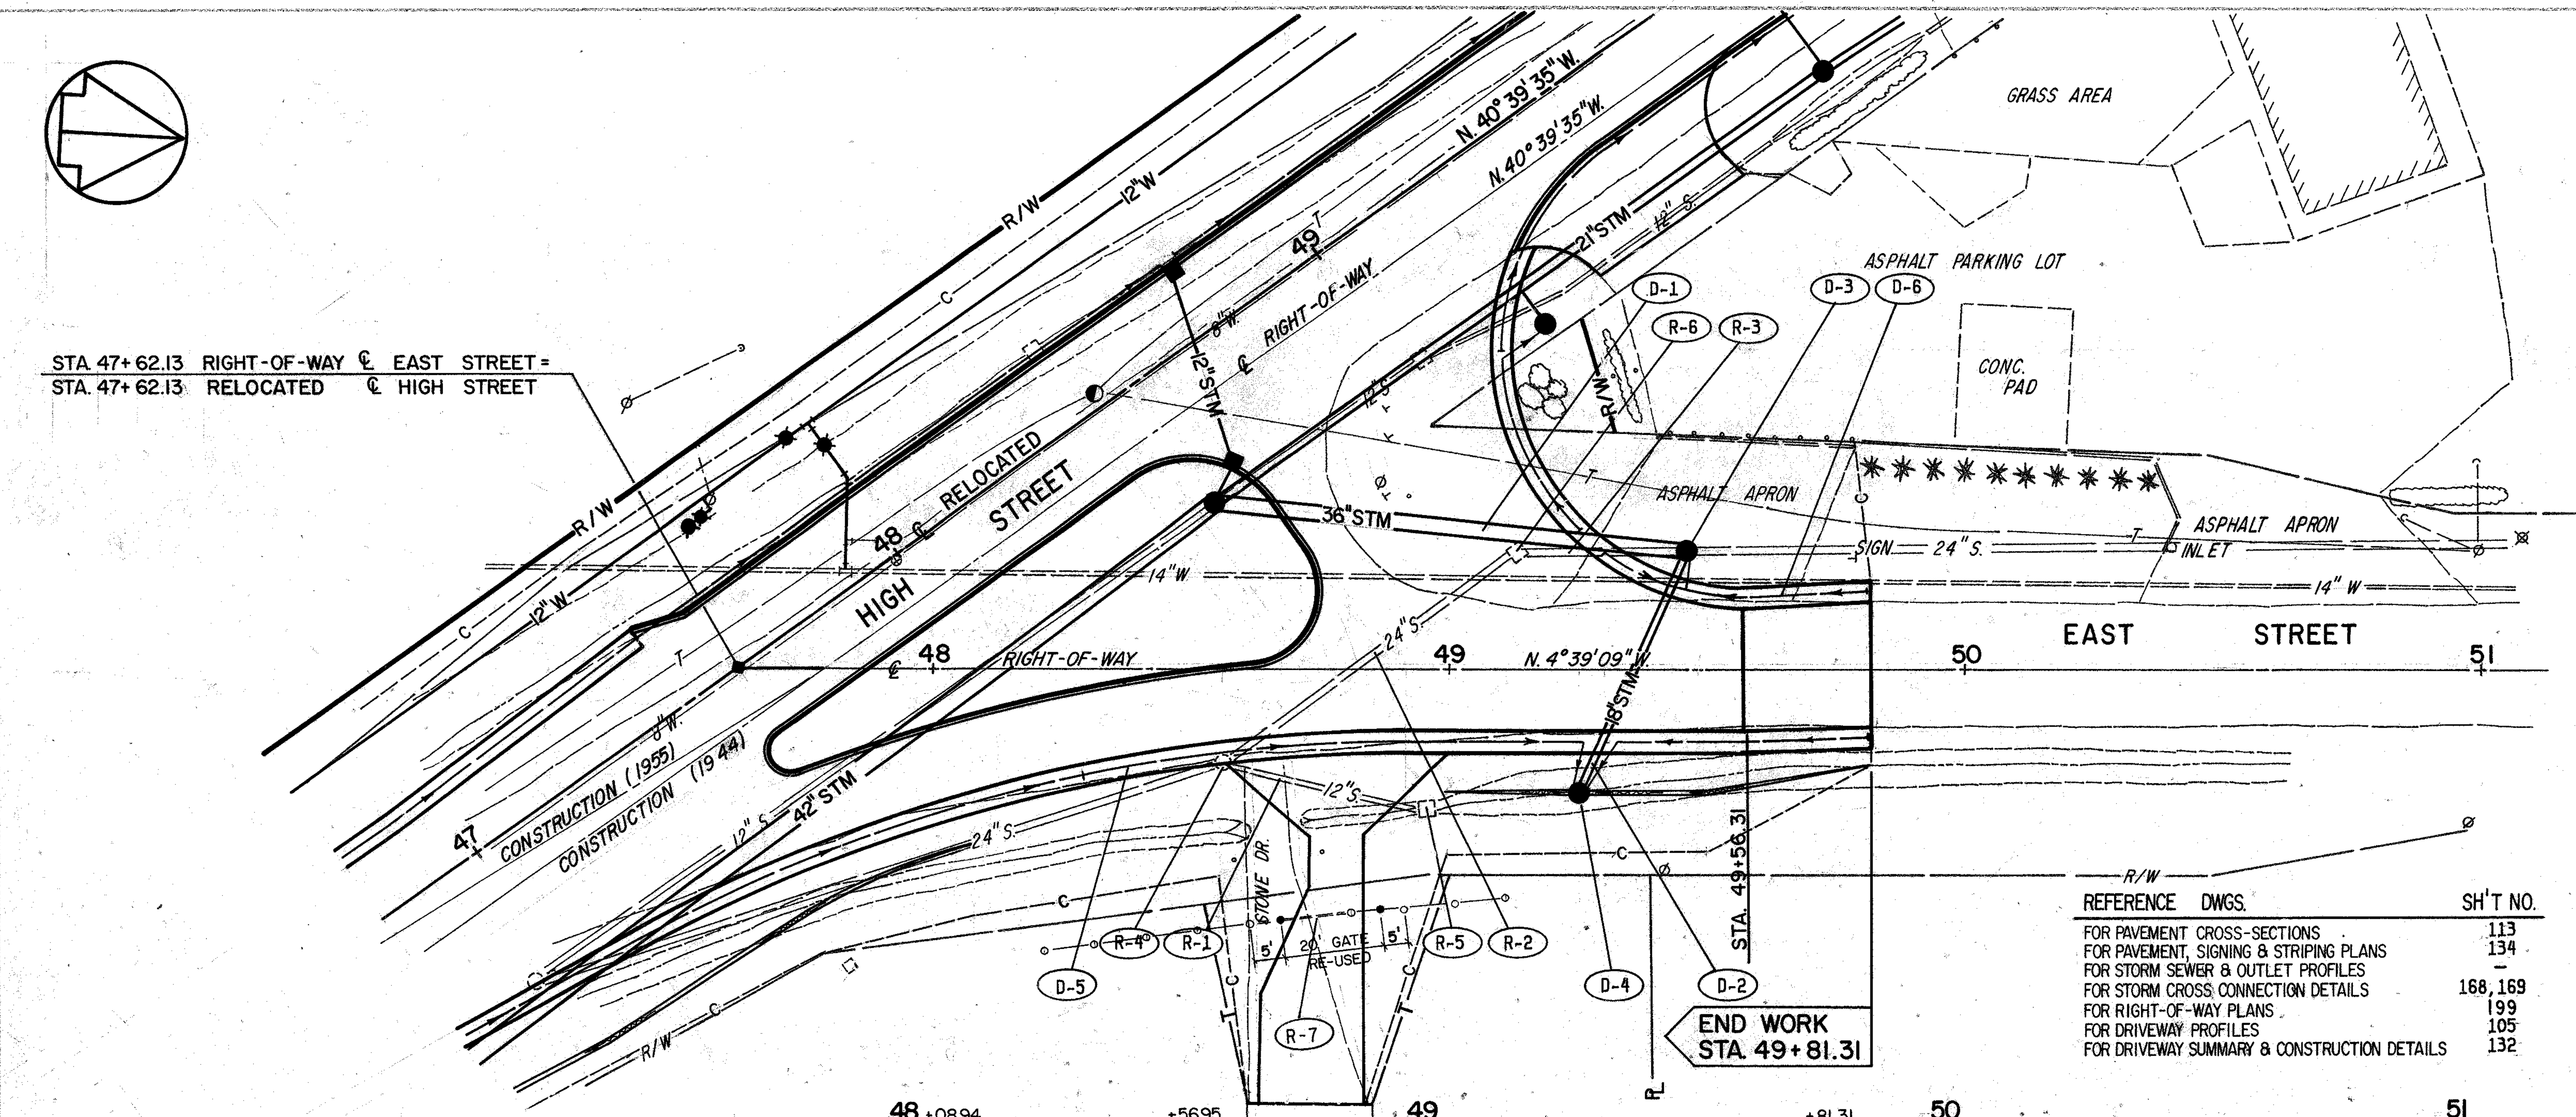

REFERENCE DWGS.	SH'T NO.
FOR PAVEMENT CROSS-SECTIONS	113
FOR PAVEMENT, SIGNING & STRIPING PLANS	134
FOR STORM SEWER & OUTLET PROFILES	–
FOR STORM CROSS CONNECTION DETAILS	168, 169
FOR RIGHT-OF-WAY PLANS	199
FOR DRIVEWAY PROFILES	105
FOR DRIVEWAY SUMMARY & CONSTRUCTION DETAILS	132

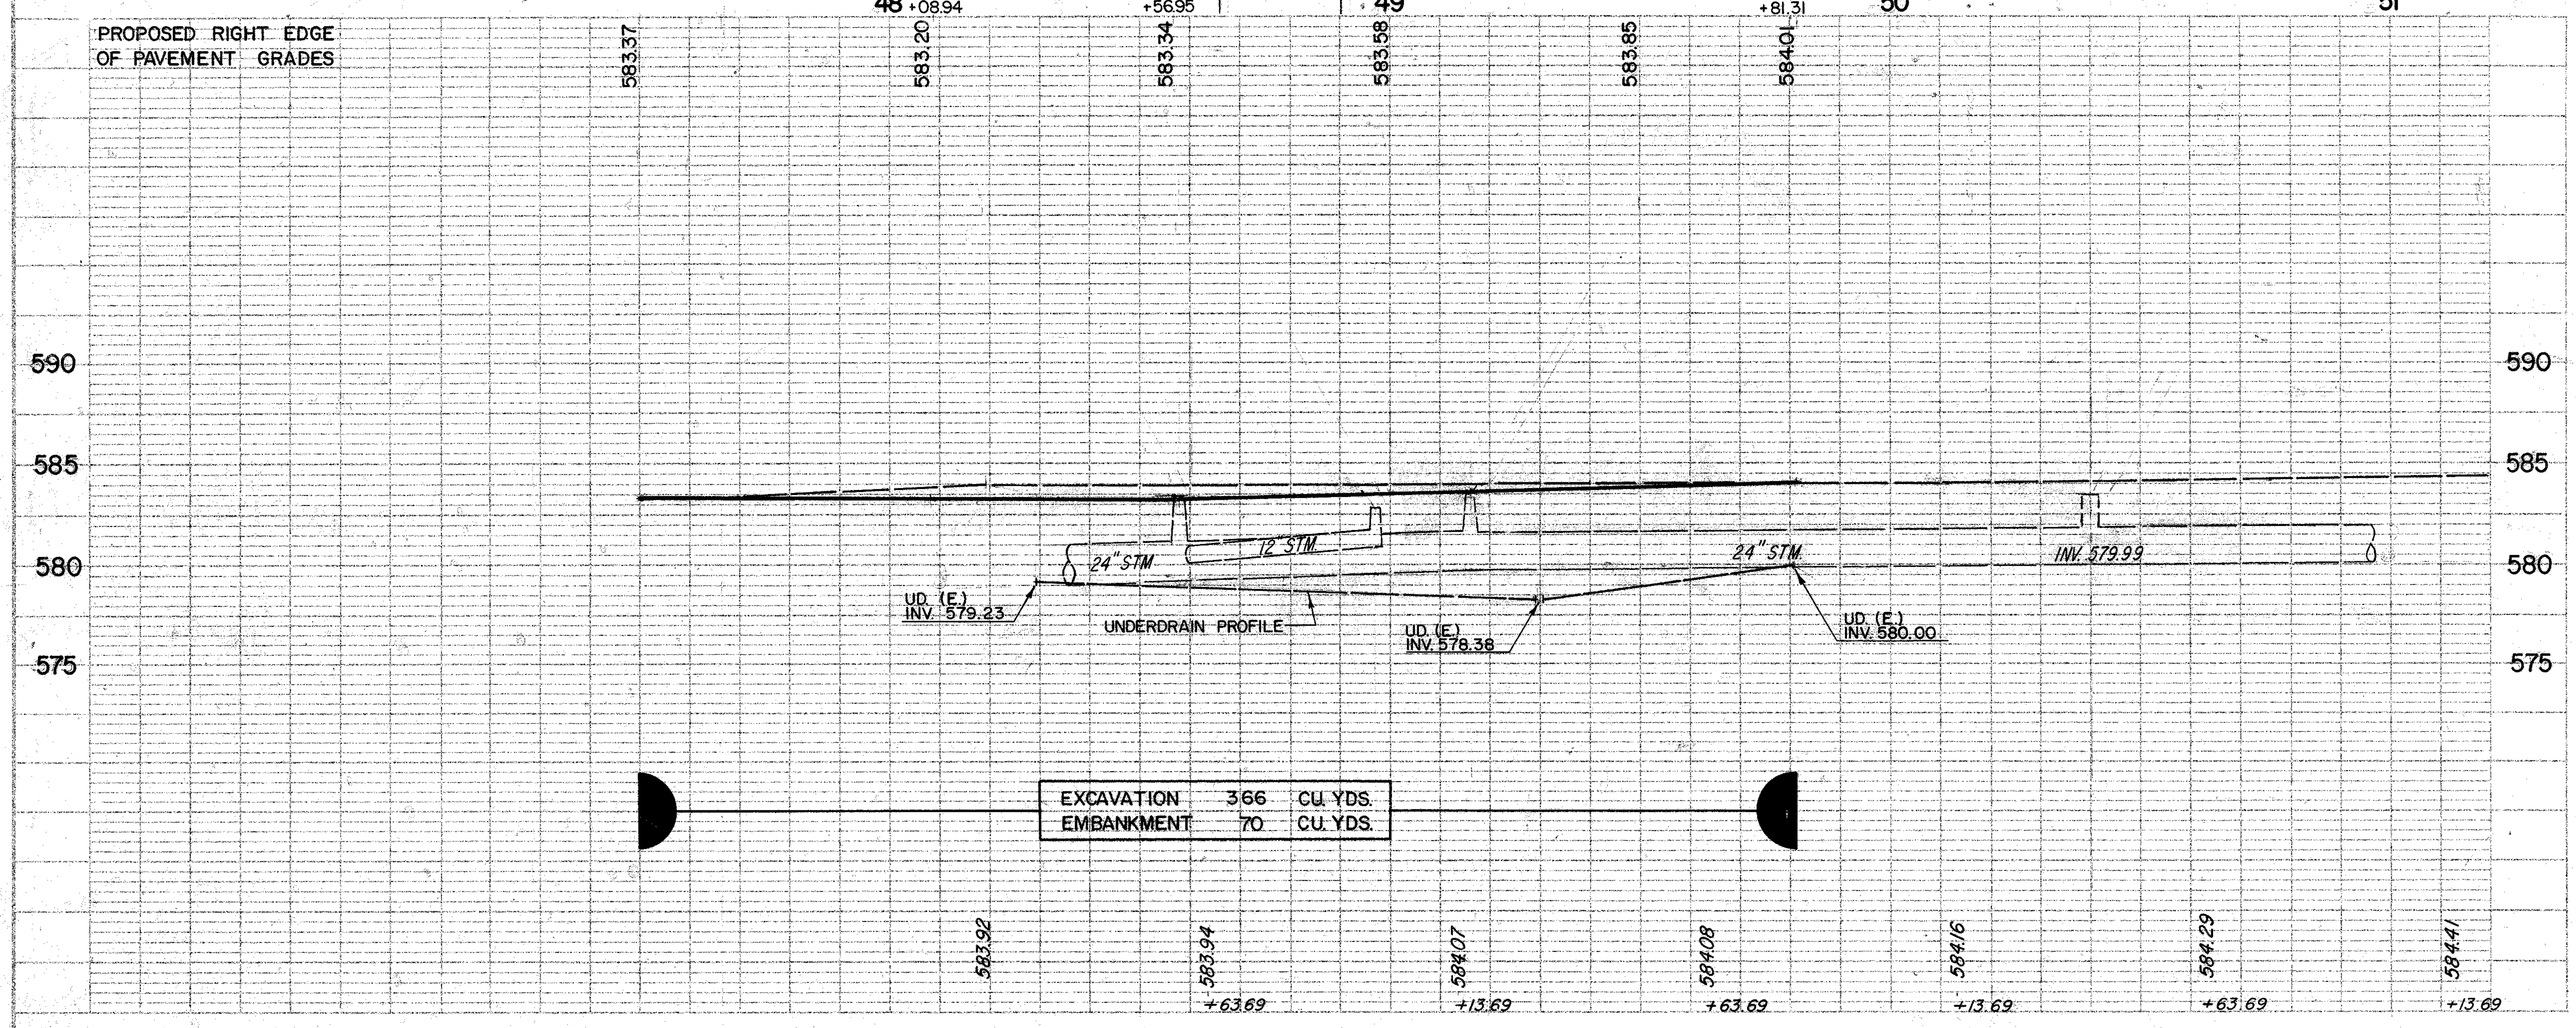

DRAINAGE

Item	Description	Unit	D-1 48+55, 28'R.(HIGH ST.) TO 49+46, 23'L.	D-2 49+25, 24'R. TO 49+46, 23'L.	D-3 49+46, 23'L.	D-4 49+25, 24'R.	D-5 48+30, 21'R. TO 49+81, 13'R.	D-6 49+10, 72'L. TO 49+81, 15'L.	TOTALS
605	6" SHALLOW PIPE UNDERDRAINS, AS PER PL.	LF.						90	90
605	6" UNCLASSIFIED PIPE UNDERDRAIN, AS PER PL.	LF.					133		133
604	CATCH BASIN, STD. NO. 2-2B	EA.				1			1
604	MANHOLE, STD. NO. 3	EA.			1				1
603	6" CONDUIT TYPE F, AS PER PLAN	LF.					20	20	40
603	18" CONDUIT TYPE B, AS PER PLAN	LF.		51.5					51.5
603	36" CONDUIT TYPE B, AS PER PLAN	LF.	92						92

ROADWAY

REF	LOCATION	202 PIPE REMOVED, 24" & UNDER	202 MANHOLE REMOVED	202 INLET REMOVED	202 FENCE REMOVED FOR RE-USE	607 FENCE REBUILT, TYPE CL	
		LF.	EA.	EA.	LF.	L.F.	
R-1	48 + 56, 18'R. TO 48+96, 27'R.	40					
R-2	48+56, 18'R. TO 49+13, 22'L.	70					
R-3	49+13, 22'L. TO 49+20, 22'L.	32					
R-4	48+56, 18'R.		1				
R-5	48+96, 27'R.			1			
R-6	49+13, 22'L.			1			
R-7	48+67, 49'R. TO 48+97, 47'R.				30	30	
	TOTALS	142	1	2	30	30	

EAST STREET

PLAN & PROFILE STA. 47+62.13 TO STA. 49+81.31

PLATE 1 PLAN-PROFILE B.P.R. STANDARD
EUGENE DIETZGEN CO. CHICAGO - NEW YORK