# CENTERLINE PLAT

## STATE OF OHIO-DEPARTMENT OF HIGHWAYS

## LAK-1-4.02

## KIRTLAND AND MENTOR TOWNSHIPS
## VILLAGE OF WILLOUGHBY HILLS AND WAITE HILL VILLAGE
## CITY OF WILLOUGHBY
## LAKE COUNTY

314
333

R/W
1 of 22

LAKE COUNTY, OHIO
Received _____ at _____
Recorded _____
Plat Book M Page 82
Signed _____ Recorder Lake County, Ohio
Fee _____

Signed _____
Right of Way Engineer, Interstate Projects
Date _____

Location and Limited Access Approved and Journalized by the Director of Highways.
Date _____ Volume _____ Page _____
Journal of the Director of Highways

0 500 1000
Scale - 1"=500'

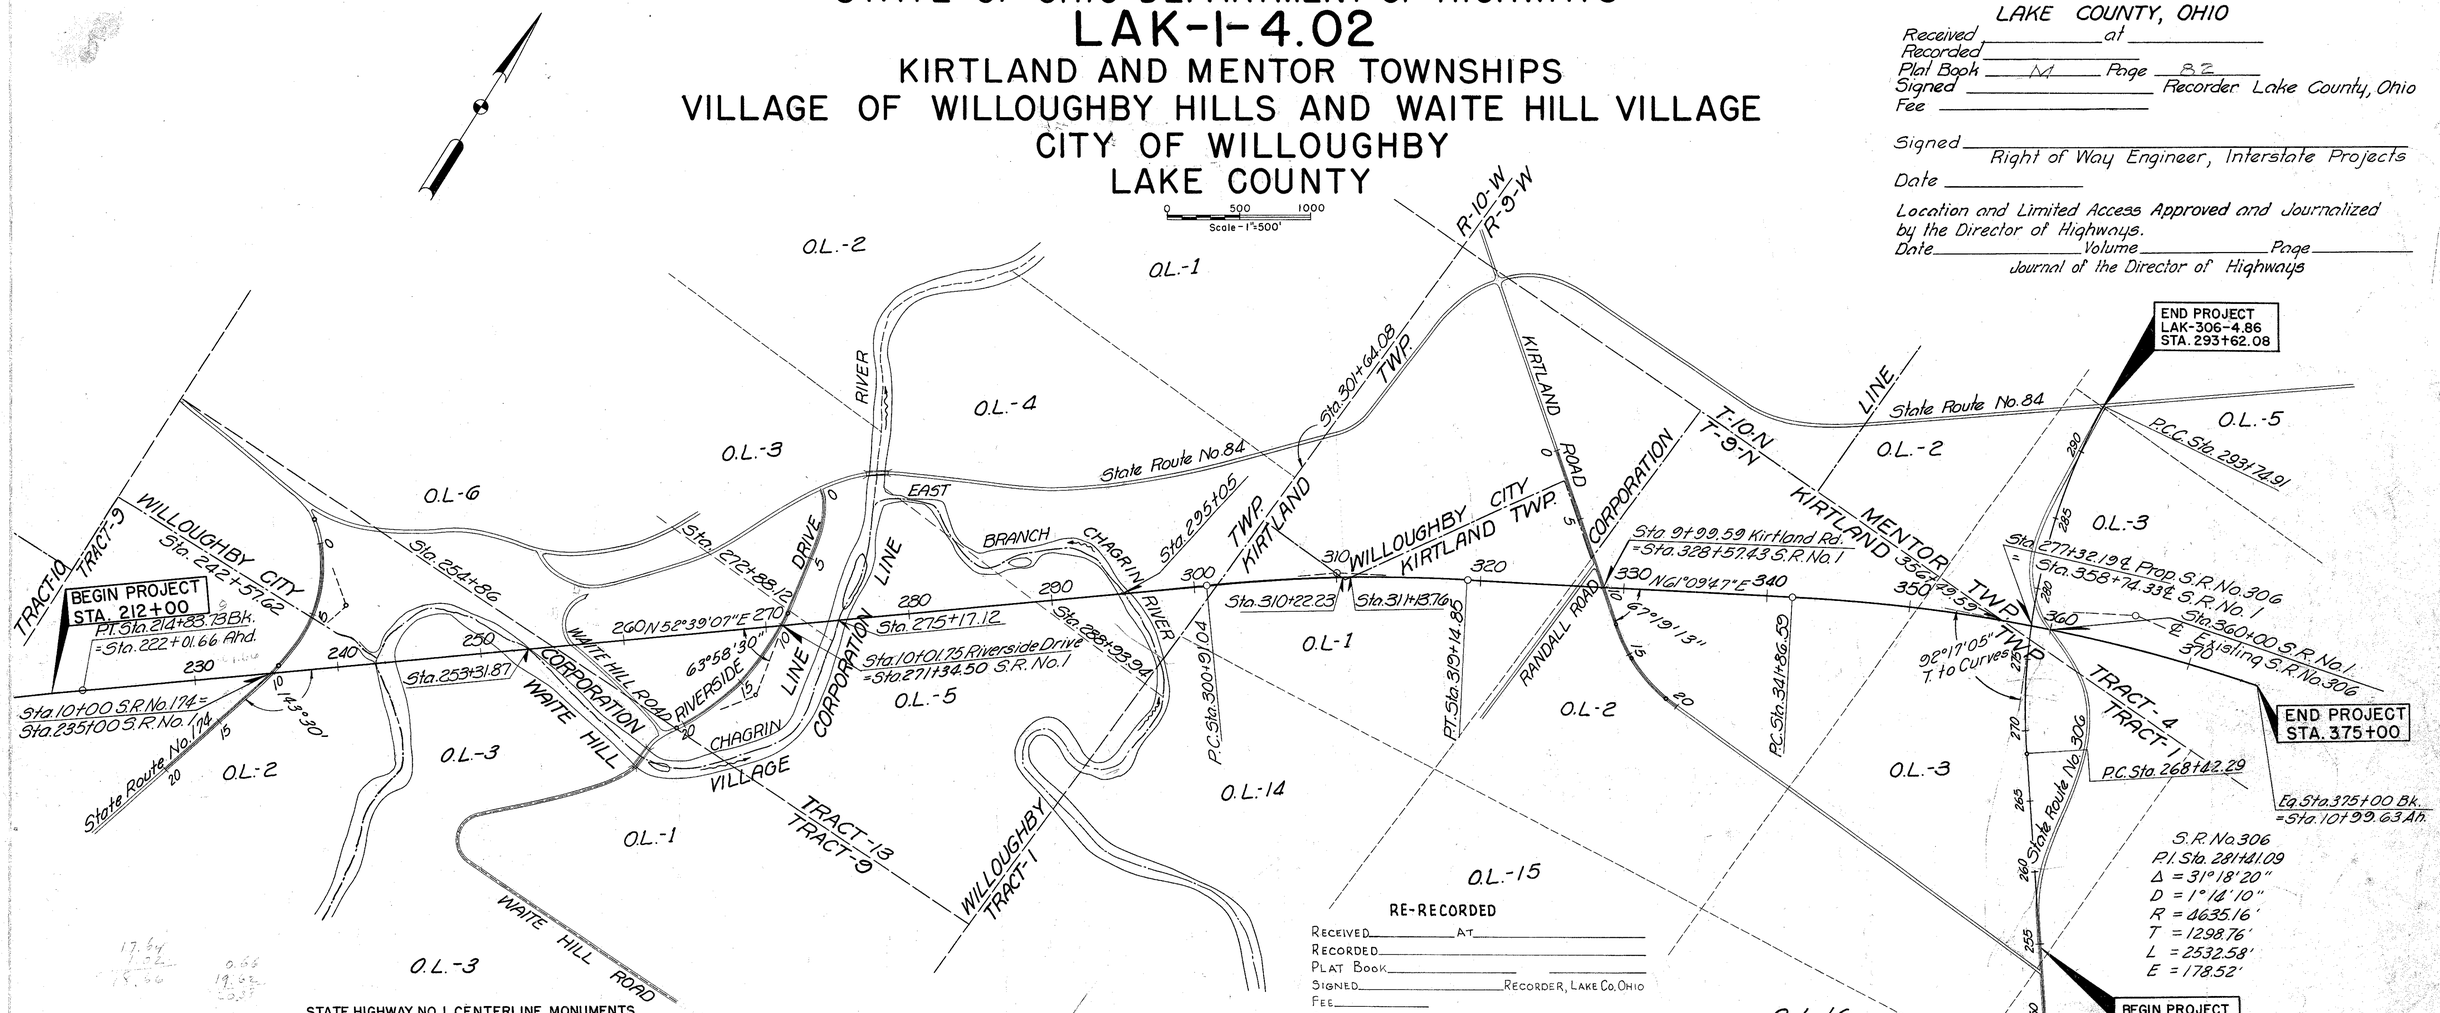


### STATE HIGHWAY NO. 1 CENTERLINE MONUMENTS

| | | | | | |
|---|---|---|---|---|---|
| P.O.C. | STA. | 212+00 | | | |
| P.T. | STA. | 222+01.66 | | | |
| P.O.T. | STA. | 228+00 | P.T. | STA. | 319+14.85 |
| " | " | 237+00 | P.O.T. | STA. | 327+00 |
| " | " | 245+00 | " | " | 335+00 |
| " | " | 253+00 | P.C. | STA. | 341+86.59 |
| " | " | 261+00 | P.O.C. | STA. | 350+00 |
| " | " | 269+00 | " | " | 358+00 |
| " | " | 277+00 | P.I. | STA. | 365+79.77 |
| " | " | 285+00 | P.O.C. | STA. | 366+00 |
| " | " | 293+00 | " | " | 375+00 |
| P.C. | STA. | 300+91.04 | | | |
| P.O.C. | STA. | 310+00 | | | |
| P.I. | STA. | 310+04.63 | | | |

### SIDE ROAD CENTERLINE MONUMENTS

| | | | | | |
|---|---|---|---|---|---|
| KIRTLAND ROAD | | | P.T. | STA. | 7+41.92 |
| " | " | | T.S. | STA. | 12+73.63 |
| " | " | | P.I. | STA. | 14+40.50 |
| " | " | | S.C. | STA. | 15+23.63 |
| STATE RTE. 306 | | | P.O.T. | STA. | 254+75 |
| " | " | " | " | " | 261+00 |
| " | " | " | P.C. | STA. | 268+42.29 |
| " | " | " | P.O.C. | STA. | 275+00 |
| " | " | " | P.I. | STA. | 281+41.09 |
| " | " | " | P.O.C. | STA. | 284+00 |
| " | " | " | P.C.C. | STA. | 293+74.91 |

S.R. No. 1
P.I. Sta. 209+80.52
Δ = 1°30'35" Lt.
D = 0°09'
R = 38,197.19'
T = 503.27'
L = 1006.48'
E = 3.32'
P.C. Sta. 204+77.25

S.R. No. 1
P.I. Sta. 310+04.63
Δ = 8°30'40" Rt.
D = 0°28'
R = 12,277.67
T = 913.59
L = 1,823.81
E = 33.94

S.R. No. 1
P.I. Sta. 365+79.77
Δ = 22°03'35" Rt.
D = 0°28'00"
R = 12,277.67
T = 2,393.18
L = 4,727.08
E = 231.06
P.T. Sta. 25+13.30

S.R. No. 306
P.I. Sta. 281+41.09
Δ = 31°18'20"
D = 1°14'10"
R = 4635.16'
T = 1298.76'
L = 2532.58'
E = 178.52'

RE-RECORDED
Received _____ At _____
Recorded _____
Plat Book _____
Signed _____ Recorder, Lake Co. Ohio
Fee _____
Signed _____
Right of Way Engineer-Interstate Projects
Date _____

MICHAEL BAKER, JR., CONSULTING ENGINEERS
ROCHESTER, PENNSYLVANIA

DATE: 3-23-59

STATE OF OHIO
DEPARTMENT OF HIGHWAYS
RIGHT OF WAY PLANS
STATE HIGHWAY NO. 1
C-44
CENTERLINE PLAT

| Designed | Drawn | Traced | Checked | Reviewed Date | Revised |
|---|---|---|---|---|---|
| R.G. | K.A. R.B.P. | K.A. | B.P. | | |