8-H

ROFILMED

SEP 26 1994

STATE OF OHIO
DEPARTMENT OF TRANSPORTATION
LAK-44-5.10
CITY OF PAINESVILLE
BRIDGE NO. LAK-44-0510
LAKE COUNTY

LAK-44-5.10	OHIO	1 / 24
	FHWA REGION 5	
F -62 (20)	FEDERAL PROJECT	

F -62 (20)

LIMITED ACCESS

THIS IMPROVEMENT IS ESPECIALLY DESIGNED FOR THROUGH TRAFFIC AND HAS BEEN DECLARED A LIMITED ACCESS HIGHWAY OR FREEWAY BY ACTION OF THE DIRECTOR, DEPARTMENT OF TRANSPORTATION, IN ACCORDANCE WITH THE PROVISIONS OF SECTION 5511.02 OF THE REVISED CODE OF OHIO.

DESIGN DESIGNATION

Current A.D.T. (1989)	= 10,070
Design Year A.D.T. (2009)	= 13,565
D.H.V.	= 1357
D.	= 60 %
T.	= 3 %
V.(Design. Speed)	= 45 mph
Legal Speed	= 35 mph
Functional Classification	= Urban Collector
Design Exceptions	= None

CONVENTIONAL SIGNS

County Line
Township Line
Section Line
Corporation Line or
Fence Line (existing) (proposed)
Center Line 352 353
Trees, Stumps, (to be removed)
Utility Poles: Telephone, Power, Light.

Limited Access (only) LA
Right of Way (only) RW
Limited Access & Right of Way LA & RW
Existing Right of Way
Property Line (in existing fence)
Railroad or
Guardrail (existing) (proposed)

INDEX OF SHEETS

Title Sheet	1
Schematic Plan And Calculations	2
Detour Plan	3
Traffic Control Plan	3A
General Notes - Roadway	4
General Summary	5-6
Ramp Plan, Typical Section And Details	7
Pavement Markings, Signs And Intersection Details	8
Ramp Cross Sections	9
Structure Repair	10-20
Cathodic Protection Details	21-24

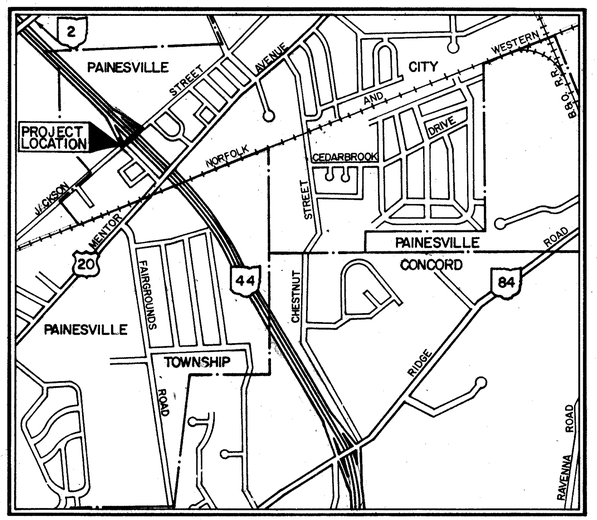

LOCATION MAP

SCALE IN FEET

0 250 500 750 1000 2000 3000 4000

Portion to be improved
State & Federal Routes
Other Roads

SCALES

Plan 0 5 10 20 30 40

Profile: Horizontal , Vertical

Cross Section: Horizontal 0 5 10 20 , Vertical 0 5 10 20

LINE DATA

Begin Project	
End Project	
Additions And/Or Deductions	0
Project Length	0.00 L.F. Or 0.00 Mi.
Add For Approaches	
Jackson St. Sta. 7+60.00 To Sta. 12+60.00	500.00 L.F.
Length Of Work	500.00 L.F. Or .095 Mi.

1989 SPECIFICATIONS

The standard specifications of the State of Ohio, Department of Transportation, including changes and supplemental specifications listed in the proposal shall govern this improvement.

I hereby approve these plans and declare that the making of this improvement will require the closing to traffic of the highway and that detours will be provided as indicated on the plans. (See sht. 3)

Approved _____
Date 1/10/90 City Manager, City of Painesville

Approved _____
Date 1/10/90 City Engineer, City of Painesville

Approved _____
Date 1-12-90 District Deputy Director of Transportation

Approved _____
Date 8/28/90 Engineer, Bureau of Bridges and Structural Design.

Approved _____
Date 9/4/90 Chief Engineer, Planning And Design

Approved _____
Date 9/14/90 Director, Department of Transportation

UNDERGROUND UTILITIES
2 WORKING DAYS
BEFORE YOU DIG
Call 800-362-2764 (Toll free)
OHIO UTILITIES PROTECTION SERVICE
NON - MEMBERS, MUST BE CALLED DIRECTLY

SUPPLEMENTAL SPECIFICATIONS			
		902	8-31-79
836	11-12-85	947	10-17-83
850	5-31-88	814	1-21-88
		931	6-18-85
852	6-10-87	921	12-4-72
		923	1-10-69
952	12-14-88	942	11-27-89
802	4-13-90	944	6-24-89
847	10-17-83		

SUPPLEMENTAL PRINTS OF STANDARD CONSTRUCTION DRAWINGS							
BP-5	10-1-87	BR-2-82	11-1-82	TC-71.10	4-9-79		
BP-7	10-1-87	SD-1-69	6-12-69	TC-42.20	3-26-79		
F-1	11-10-83	BP-12	10-1-87	TC-52.20	4-3-79		
GR-1	1-11-85	EXJ-4-87	1-5-89	TC-41.20	3-26-79		
GR-2B	2-5-82	BP-3	12-6-76	MT 99.10	11-14-86		
GR-4A	1-30-84	GR-3B	1-21-85				
CB-3A	5-1-79	BP-11	1-30-84	MT-97.10	4-29-88		
MH-1	12-18-94						
BP-4	10-1-87	BP-2	1-11-85	LA-1	6-1-79		
MC-4	7-26-76	GR-4	2-5-82				
MH-3	12-18-84						
MC-11	8-1-78						
MH-5	6-12-75						

Plan Prepared By:

Burgess & Niple, Limited
Engineers and Architects

STATE OF OHIO WILLIAM ALLEN EARLSON REGISTERED PROFESSIONAL ENGINEER
SEAL

DEPARTMENT OF TRANSPORTATION
FEDERAL HIGHWAY ADMINISTRATION

APPROVED:

DIVISION ADMINISTRATOR DATE

05657

Project: LAK-44-5.10
Date of Letting _____ 19__ Contract No. _____

LD0300 Rev. 11-1-78