J-J-12

STATE OF OHIO
DEPARTMENT OF TRANSPORTATION

LAK-615-5.54	OHIO	1
	FHWA REGION 5	15
BWM - 1A37 (1)	FEDERAL PROJECT	

LAK-615-5.54

BWM-1A37(1)

CITY OF MENTOR
LAKE COUNTY
BIKE PATH

CONVENTIONAL SIGNS

County Line
Township Line
Section Line
Corporation Line or
Fence Line (existing) (proposed)
Center Line 352 353
Trees, Stumps, (to be removed)
Utility Poles: Telephone, Power, Light

Limited Access (only) LA
Right of Way (only) RW
Limited Access & Right of Way LA & RW
Existing Right of Way
Property Line (in existing fence)
Railroad or
Guardrail (existing) (proposed)

INDEX OF SHEETS

TITLE SHEET	1
GENERAL NOTES	2
GENERAL SUMMARY	3
TYPICAL SECTIONS	4
PLAN & PROFILE CIVIC CENTER BLVD.	5
PLAN & PROFILE MUNSON RD.	6-8
PLAN & PROFILE TRAIL ROUTE	9-10
BOX CULVERT DETAILS	11
CROSS SECTIONS	12-14
MISC. DETAILS	15

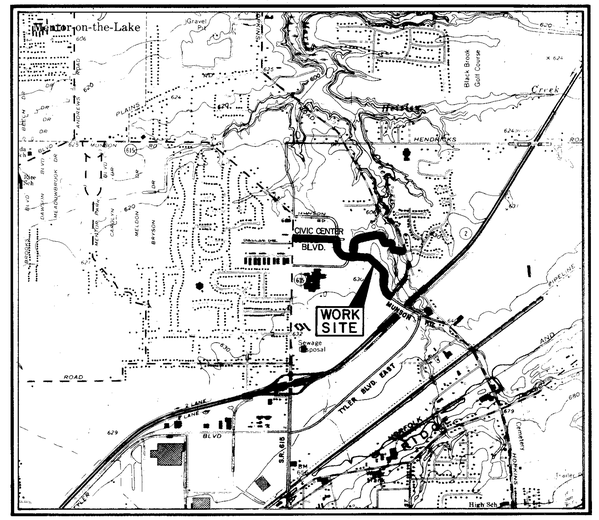

LOCATION MAP

SCALE IN FEET
0 2000 4000 6000 8000

Portion to be improved
State & Federal Routes
Other Roads

SCALES

Plan 0 50 100
Profile: Horizontal 0 50 100, Vertical 0 5 10
Cross Section: Horizontal 0 5 10, Vertical 0 5 10

LINE DATA

CIVIC CENTER BLVD.
BEGIN WORK — STA. 0+44, 47.0' R.
SUSPEND WORK — STA. 9+94, 47.0' R.
LENGTH OF WORK = 950 L.F. OR 0.180 MILES

RELOCATED MUNSON RD.
RESUME WORK — STA. 25+61.94, 17.0' L.
END WORK — STA. 54+90.80, 44.5' L.
ADDITIONS AND/OR DEDUCTIONS — -69.80 L.F.
LENGTH OF WORK = 2859.06 L.F. OR 0.541 MILES

TRAIL ROUTE
BEGIN WORK — STA. 0+00
END WORK — STA. 22+20.95
ADDITIONS AND/OR DEDUCTIONS — -74.86 L.F.
LENGTH OF WORK = 2146.09 L.F. OR 0.406 MILES

NET LENGTH OF WORK = 5955.15 L.F. OR 1.128 MILES
NET LENGTH OF PROJECT = 0.00 L.F. OR 0.00 MILES

PREPARED FOR THE CITY OF MENTOR, OHIO
JOHN T. REINHARD, P.E. 18779
CITY ENGINEER
BY
COLPETZER-THOMAS, INC.
AN ENGINEERING GROUP

STATE OF OHIO — JOHN T. REINHARD 18779 — REGISTERED PROFESSIONAL ENGINEER

UNDERGROUND UTILITIES
TWO WORKING DAYS BEFORE YOU DIG
CALL 800-362-2764 (TOLL FREE)
OHIO UTILITIES PROTECTION SERVICE

NON-MEMBERS MUST BE CALLED DIRECTLY

Project:
Date of Letting _____ 19__, Contract No. _____

LD0300 Rev. 11-1-78

SUPPLEMENTAL PRINTS OF STANDARD CONSTRUCTION DRAWINGS				
BP-5	1-11-85			
CB-2-2-A & B	5-1-79			
MC-4	7-26-76			
MC-11	8-1-78			
LA-1	6-1-79			
TC-41.20	3-26-79			
TC-52.10	4-3-79			
TC-52.20	4-3-79			
BP-3	12-6-76			
BP-2	1-11-85			
BP-7	12-6-76			

SUPPLEMENTAL SPECIFICATIONS	
955	6-3-78
932	3-25-85
848	10-2-85

1985 SPECIFICATIONS

The standard specifications of the State of Ohio, Department of Transportation, including changes and supplemental specifications listed in the proposal shall govern this improvement.

MICROFILMED APR 1 1992

I hereby approve these plans and declare that the making of this improvement will not require the closing to traffic of the highway and that provisions for the maintenance and safety of traffic will be as set forth on the plans and estimates.

Approved Martin A. Gallitz
Date 1-14-86 District Deputy Director of Transportation

Approved Walter J. Jestings / CPD
Date 2-24-86 Engineer, Bureau of Bridges and Structural Design

Approved Wayne H. Kauble
Date 4-25-86 Chief Engineer, Planning & Design

Approved Warren J. Smith
Date 4-25-86 Director, Department of Transportation

000152 3496

DEPARTMENT OF TRANSPORTATION
FEDERAL HIGHWAY ADMINISTRATION

APPROVED:

DIVISION ADMINISTRATOR DATE