LAKE COUNTY
LAK-1-12.89

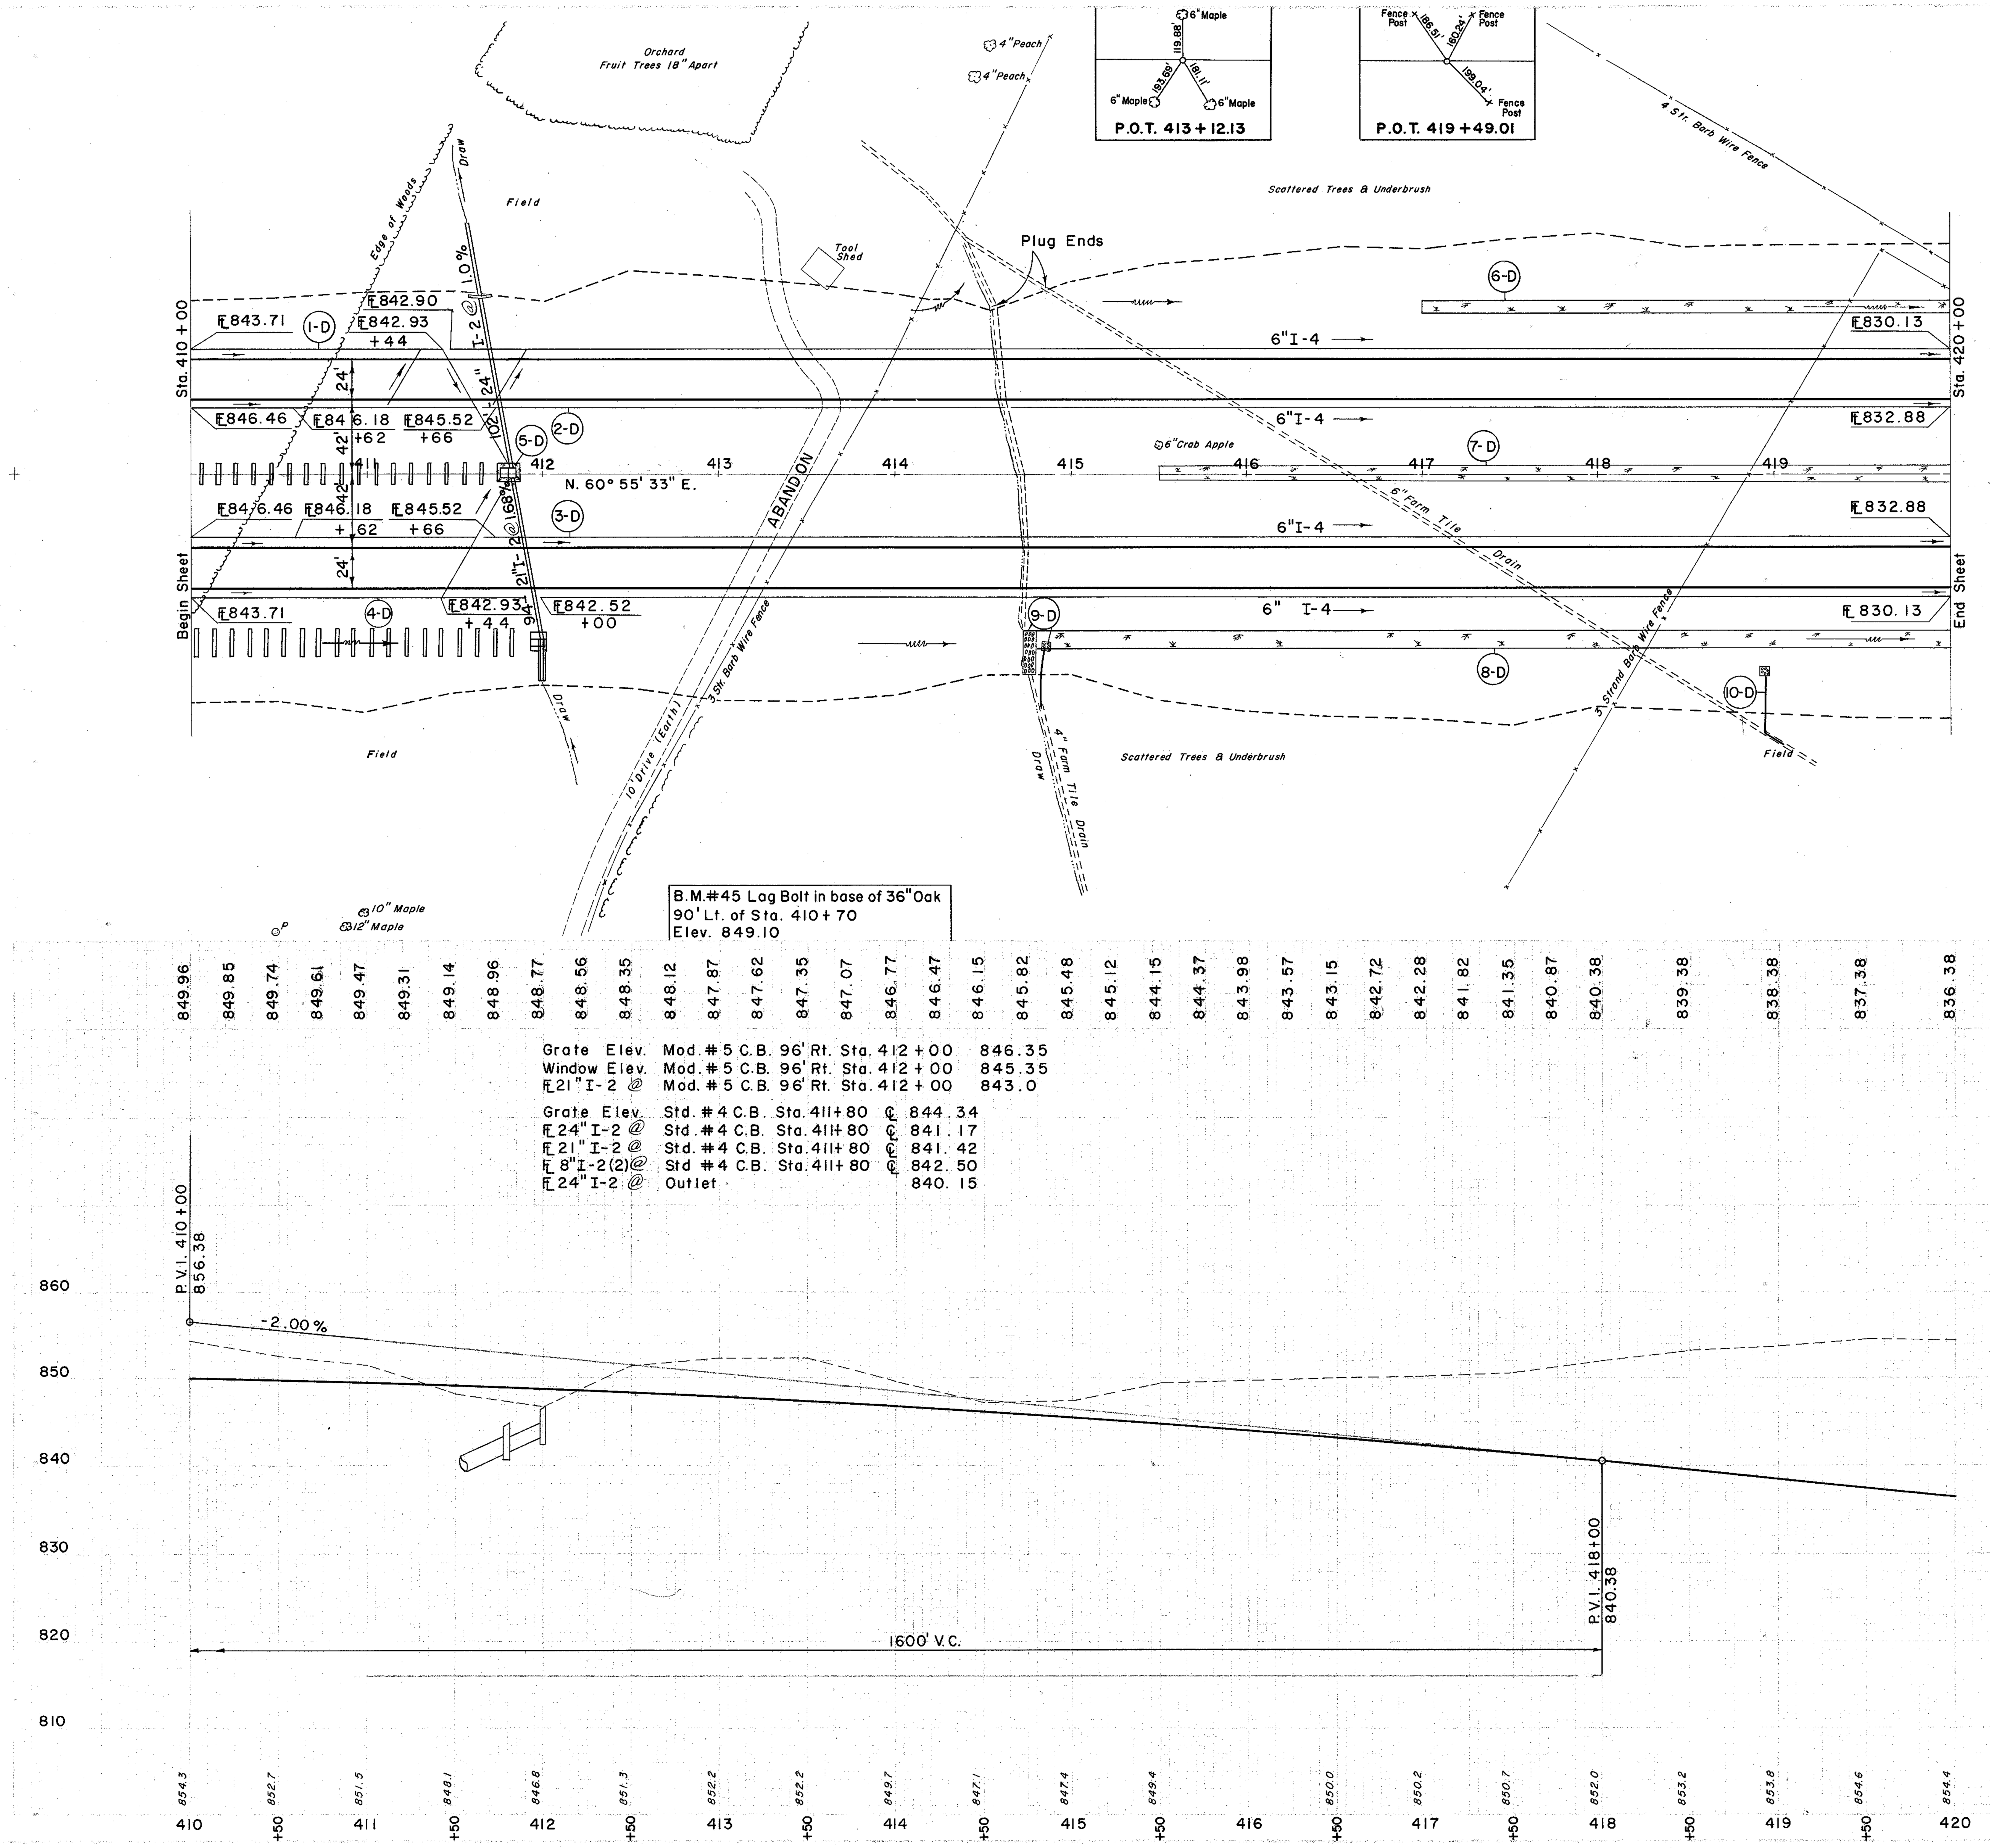

REF. NO.	STATION FROM	STATION TO	SIDE	E-2 EXCAV. FOR STRUCT. C.Y.	S-1 CONC. FOR STRUCT. CL. "C" C.Y.	S-4 REINF. STEEL LBS.	S-29 DRAINAGE OF STRUCT. (NO.2 AGGR.) C.Y.	I-2 CL."A" STORM SEWER UNDER PAVMT. SEC. M-6.5(b) OR M-6.8(b) 8"	I-2 21"	I-2 24"	I-2 8" OUTLET PIPE SEC. M-6.4(c) LIN. FT.	I-3 6" ROADWAY DRAINAGE	I-3 8" PIPE OUTLETS FOR RDWY DRAINAGE SEC. M-6.4(c)	I-4 6" PIPE UNDERDRAIN SHALLOW	I-4 DEEP	I-5 6" 60° BEND	I-5 6" 60° WYE	I-5 6" x 8" INCREASER	I-5 6"x8"x8" 60° WYE M-6.5(b) OR M-6.8(b) EACH	I-8 STD.#4 CATCH BASIN	I-8 MOD.#5 CATCH BASIN	I-10 DUMPED ROCK CHANNEL PROTECT C.Y.	I-14 TYPE I PAVED GUTTER L.F.	L-10 SODDING S.Y.
1-D	410+00	420+00	71'LT.					66			10				1032	1	2	1	1					
2-D	410+00	420+00	37'LT.											996										
3-D	410+00	420+00	37'RT.											996										
4-D	410+00	420+00	71'RT.					66			10				994			1	1					
5-D	411+80		—	10	5.0	236			94	102										1	1		10	118
6-D	417+00	420+00	LT.																					220
7-D	415+50	420+00	℄																					460
8-D	415+00	420+00	RT.																					556
9-D	414+80		RT.				0.3					20	10									17		
10-D	419+00		RT.				0.3					33	10			1								

SODDING						
LEFT DITCH						
STATION	DEPTH OF SODDING FT.	SLOPES F	SLOPES B	WIDTH OF SODDING FT.	LENGTH FT.	S. Y.
417+00	.2	8:1	3:1	6.2	300	220
420+00	.3	8:1	2:1	7.0		
					SUBTOTAL	220
MEDIAN						
415+50	.25	8:1	8:1	8.0	450	460
420+00	.4	8:1	8:1	10.4		
					SUBTOTAL	460
RIGHT DITCH						
415+00	.5	8:1	3:1	9.5	500	556
420+00	.6	8:1	3:1	10.6		
					SUBTOTAL	556

67,255 C.Y.
609 C.Y.
17.5 716 C.Y.