LOCATION PLAN

LAK - I - 16.55

CONCORD & LEROY TOWNSHIPS

LAKE COUNTY

0 1000 2000

SCALE IN FEET

MONUMENTS TO BE SET AFTER CONSTRUCTION			
STATION	℄	STATION	℄
520 + 00	P.O.T.	617 + 00	P.O.T.
527 + 00		627 + 00	
535 + 00		631 + 65.33 P.C.	
543 + 00		640 + 00	P.O.C.
551 + 00	Offset	648 + 00	
559 + 00		657 + 00	Offset
567 + 00		667 + 00	
575 + 00		672 + 00	
583 + 00		679 + 59.77 P.T.	
591 + 00		688 + 00	Offset
599 + 00		696 + 00	P.O.T.
607 + 50			

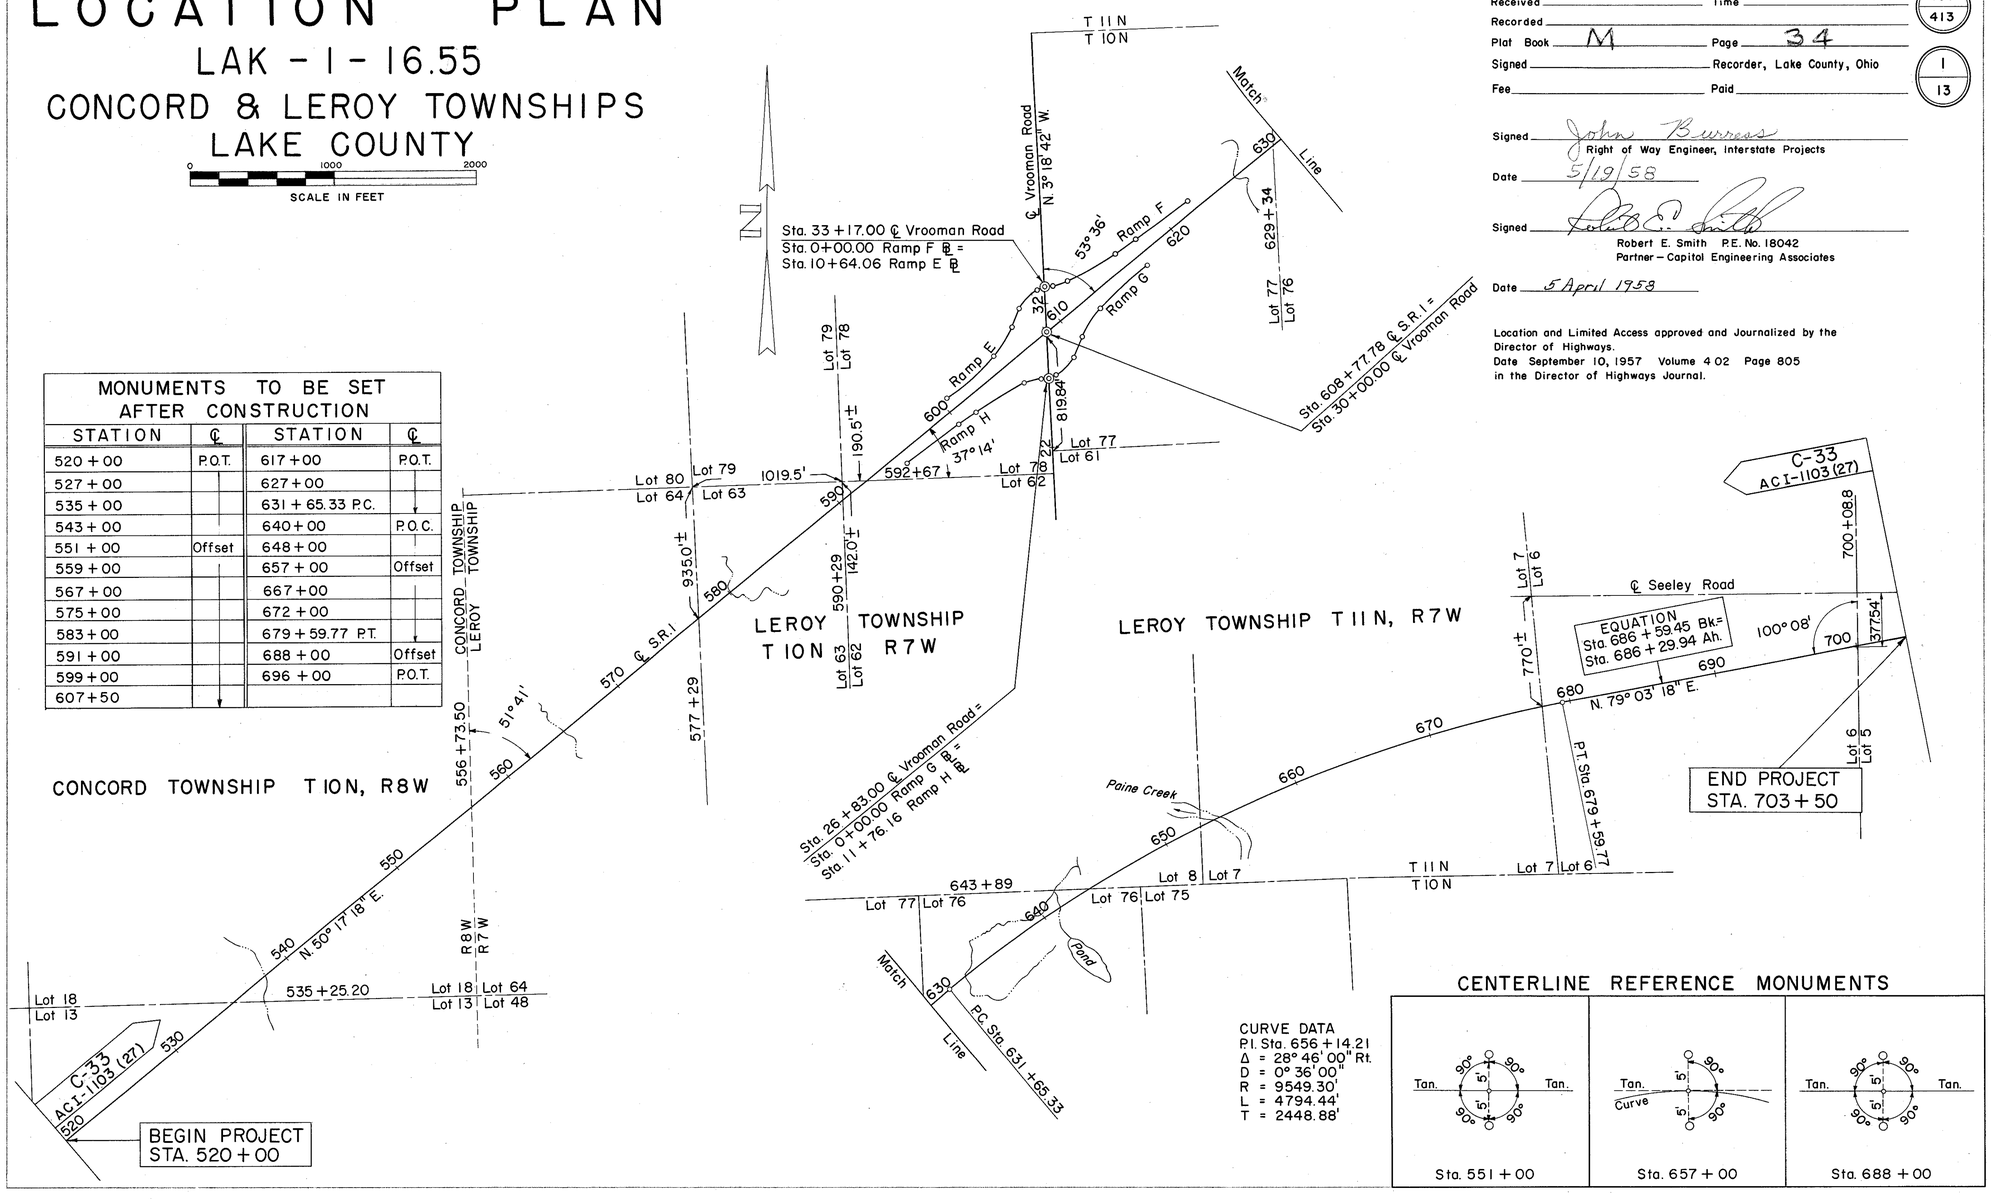

CURVE DATA
P.I. Sta. 656 + 14.21
Δ = 28° 46' 00" Rt.
D = 0° 36' 00"
R = 9549.30'
L = 4794.44'
T = 2448.88'

CENTERLINE REFERENCE MONUMENTS

Received _____ Time _____
Recorded _____
Plat Book M Page 34
Signed _____ Recorder, Lake County, Ohio
Fee _____ Paid _____

401
413

1
13

Signed John Burress
Right of Way Engineer, Interstate Projects
Date 5/19/58

Signed Robert E. Smith
Robert E. Smith P.E. No. 18042
Partner – Capital Engineering Associates
Date 5 April 1958

Location and Limited Access approved and Journalized by the Director of Highways.
Date September 10, 1957 Volume 402 Page 805 in the Director of Highways Journal.